




TRANSPORTATION

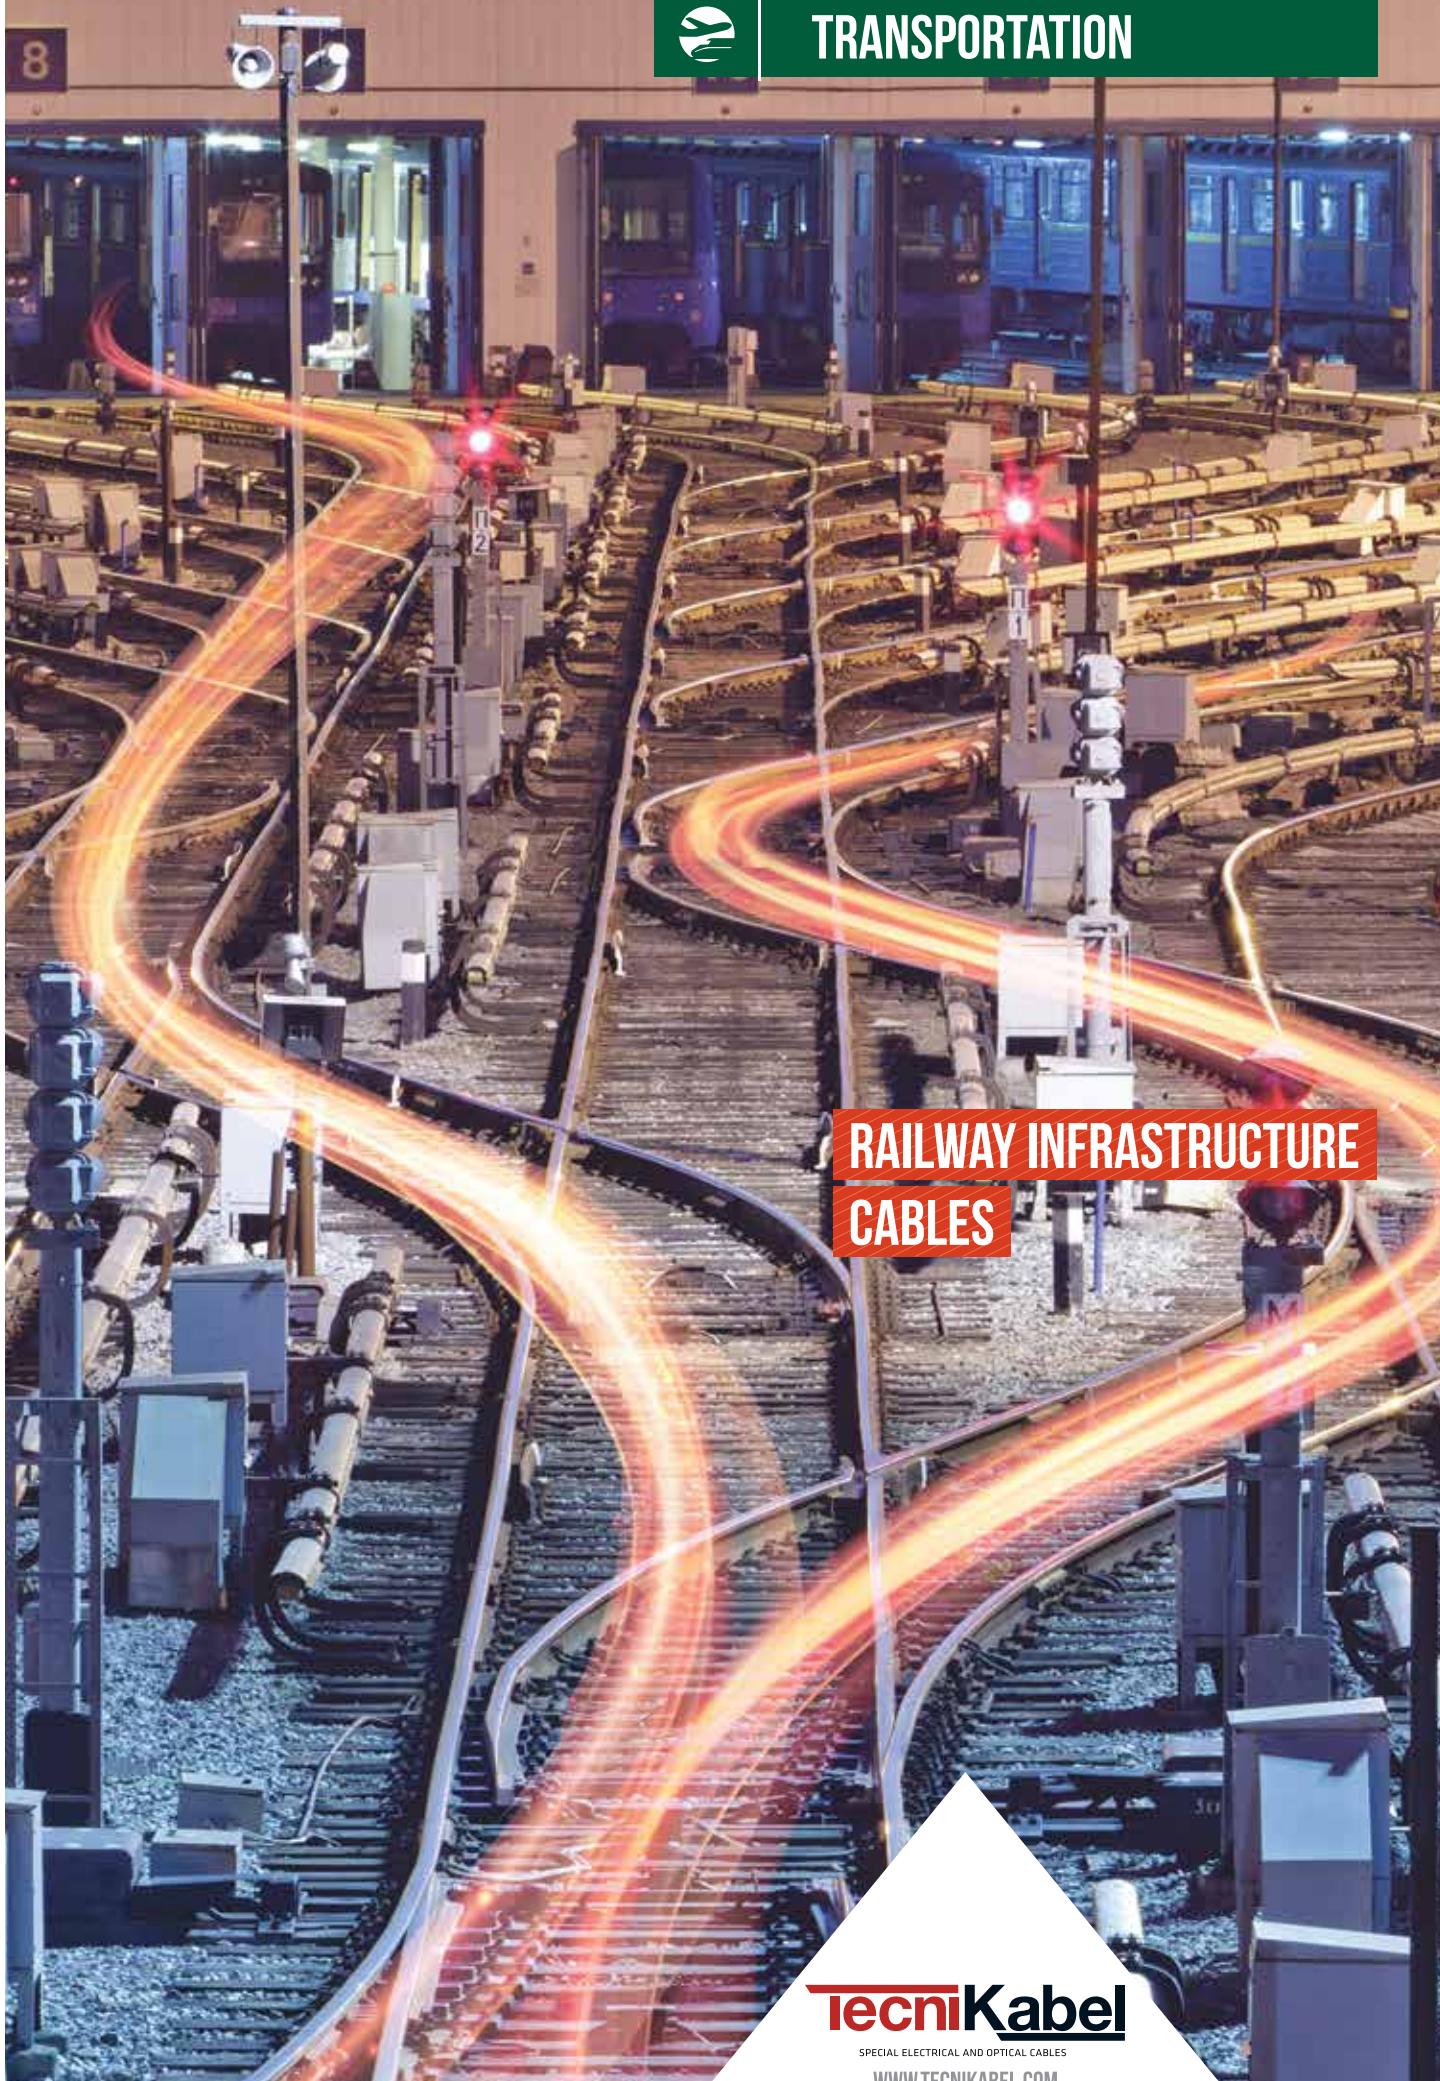

tecnikabel

SPECIAL ELECTRICAL AND OPTICAL CABLES

WWW.TECNIKABEL.COM

iecnıKabel

SPECIAL ELECTRICAL AND OPTICAL CABLES



INTRODUCTION

The new high-speed trains and the sensible increase of the traffic, with congested lines, is the result of the latest development of the rail sector.

As a result, the need for high safety standards for the rail transport has become more critical and drew the attention of the Transportation sector.

In order to provide users with high standards and a reliable service, the industry has focused its efforts on the development of the signalling equipment, handling the exchange of information between the system and the moving vehicle.

We engineer and manufacture copper and fiber optic cables for the entire range of the signalling systems adopted by both the mass transit and high-speed lines.

Our different product lines meet system requirements of the whole Industry; our cables are specially designed for any specific application, being indoor/outdoor, aerial, directly buried or in-duct.


We constantly focus our efforts on satisfying the transportation requirements in terms of construction, and stand out in the market for our expertise in the product engineering according with any specific requirement.

Our production range includes a wide range of products suitable for:

- *Tunnel installation and indoor environments.* This is achieved by our LZOH non-propagating compounds which satisfy the severe international standards
- *Security Systems.* Our Fire resistant cables guarantee a steady supply of the system, even in the event of a fire.
- *High mechanical stress.* Our cables can withstand heavy loads and severe environmental conditions, such as Arctic temperatures and High Magnetic Interferences

Our cables are the result of broad enthusiasm, constant research and deep expertise, always aiming at the full satisfaction of our customers, an endless improvement of the comfort and the safety in the rail transportation.

PRODUCT LINES

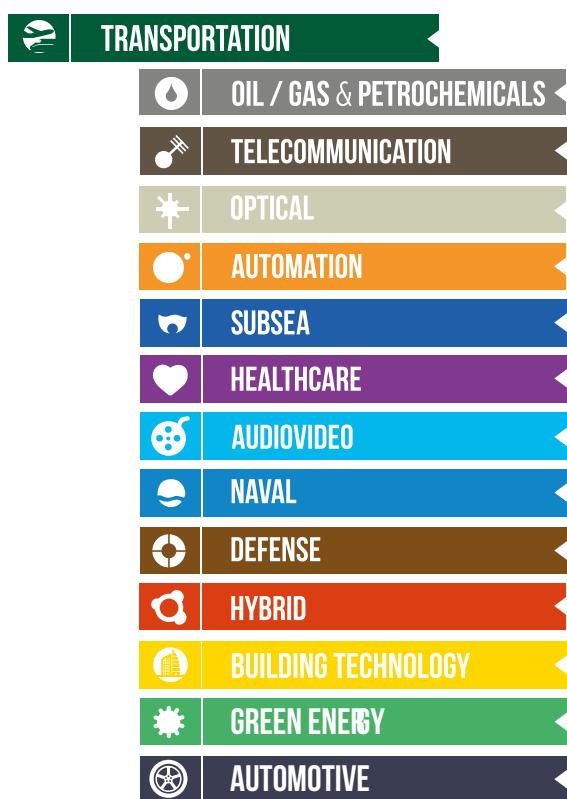

TECNIKABEL

is focused on constant product innovation to get competitive advantages with endless commitment to research and development.

PRODUCTION

Updated production Systems, stringent process procedures and expert operators reached the goal to carry out our production efficient and flexible.

FINAL INSPECTIONS

At the end of every production process each cable is checked in its electrical and physical performances for a complete compliance to customer specifications.

LABORATORY TESTS

We submit our cables to the most severe tests, simulating critical applications. In addition to the tests required by current norms, we invest on new special equipment for additional mechanical and electrical testing, heading to a steady increase of standard performance of our cables.

MATERIALS RESEARCH AND DEVELOPMENT

Our thirty year experience took us to carry on research of new materials in order to improve performances, costs and fulfill the standards required by our customers.

QUALITY SYSTEM AND PRODUCT CERTIFICATION

Since 1978, constant commitment to Quality has awarded Tecnikabel approval from American and European Authorities, complying with the most demanding international manufacturing and quality standards.



Sito certificato:
Volpiano



FIRE PERFORMANCE	9
CONSTRUCTION PRODUCTS REGULATION	12
SCMT EUROBALISE - TRACKSIDE SUBSYSTEM CABLES	13
TK-SCMT-SST ENCODER BOA _x2x0.9	14
TK-SCMT-SST 1x2x1.4	15
TK-SCMT-SST 1x2x1.6	16
TK-BOA EUROBALISE 1x2x1.02	17
TK-TX/RX CDB AUDIOFREQUENCY TRACK CIRCUIT	18
TK-BALISE CABLES	19
TK-CDB AUDIOFREQUENCY MULTIPAIRS 1.4 TRACK CIRCUIT	20
TK-EUROBALISE MULTIPAIRS 0.9	21
TK-EUROBALISE MULTIPAIRS 0.9 ARMoured	22
TELECOMMUNICATION CABLES	23
TK-TELEPHONE MULTIPAIRS 0.7	24
TK-TRAIN DETECTION 4x1.4	25
TK-CANCABLE 2x2x1.3	26
TK-UNBALANCED CURRENT SENSOR 2x2x0.9	27
TK-TELEPHONE MULTIQUADS 0.7	28
TK-TELEPHONE MULTIQUADS 0.9/1	29
TK-PZB INDUSI AUTOMATIC TRAIN CONTROL 4x0.75	30
TK-ARMoured PZB INDUSI AUTOMATIC TRAIN CONTROL 4x0.8	31
TK-LAN S/FTP CABLE	32
TK-ARMoured 4 PAIRS AWG 18	34
SIGNALLING CABLES	35
TK-H5 SIGNAL MULTICONDUCTORS - REDUCTION FACTOR	36
TK-H5 SIGNAL MULTIQUADS	38
TK-H7 SIGNAL MULTICONDUCTORS - REDUCTION FACTOR	40
TK-H7 SIGNAL MULTIPAIRS - REDUCTION FACTOR	42
TK-CW SIGNAL MULTIQUADS - REDUCTION FACTOR	44
TK-UNARMoured 409 SIGNAL	46
TK-ARMoured 409 SIGNAL	47
TK-DIELECTRIC ARMoured 409 SIGNAL	48
TK-411 SIGNAL	50
TK-412 SIGNAL	51
TK-POINT MACHINE	52
POWER AND CONTROL CABLES	53
TK-CONTROL FOR AUTOMATIC BLOCK	54
TK-POWER FOR AUTOMATIC BLOCK	55
TK-ANTI-THEFT CABLE FOR POINTS HEATING	56
TK-POWER AND CONTROL	58
OPTICAL CABLES	59
TK-BCA FIBER OPTIC TRAIN DETECTION	60
TK-DIELECTRIC OPTICAL CABLE FOR SSE	61
TK-MTB BREAKOUT CABLES - LSZH	62
TK-MTBA ARMoured BREAKOUT CABLES - LSZH	63
TK-UT9X ARMoured UNITUBE	64
TK-UTXD ARMoured UNITUBE DOUBLE SHEATH	66
TK-MT9X ARMoured MULTITUBE	68
TK-API AIRBAG PROTECTION	72
TK-MT6X ARMoured MULTITUBE	74
TK-MTAS MULTITUBE ADSS	76
FIBER CHARACTERISTICS	79

SYMBOLS

ENVIRONMENTAL PROPERTIES



FLAME RETARDANT SINGLE WIRE
(EN/IEC 60332-1-2, EN 50265-2-1)



ANTIBALLISTIC PROTECTION



FLAME RETARDANT BUNCHED WIRES
(IEC 60332-3, EN 50305 9.1.2, EN 503059-1,
EN 50266-2-5, EN 50266-2)



UV RESISTANT



FIRE RESISTANCE
(IEC 60331, EN50200, EN 50362, BS6387 CWZ)



ARCTIC CABLE



REDUCED EMISSION OF FUMES AND TOXIC
GASES (IEC 60754-1; EN 50267-2-1/2,
EN 50305 9.2)



INDOOR/OUTDOOR



SMOKE DENSITY (EN/IEC 61034-1/2)
(EN 50268-2; EN 50268-1/2)



REDUCTION FACTOR



LOW ACIDITY AND CORROSION OF EVOLVED
GASES (IEC 60754-2, EN 50267-2-2)



CHEMICAL PROPERTIES



WEATHERING TEST RESISTANCE
(OUTDOOR)



MUD RESISTANCE



INDOOR



MINERAL OIL RESISTANCE



WATER RESISTANCE



HYDROCARBONS RESISTANCE



RODENT RESISTANCE



PVC VERSION



HAZARDOUS AREA



MECHANICAL PROPERTIES



FLEXIBLE INSTALLATION



MECHANICAL RESISTANCE



FULLY DIELECTRIC



REDUCED BENDING RADIUS



DIRECT BURIAL



WORK AT LOW TEMPERATURE







FIRE PERFORMANCE



IEC 60332-1-2 / EN 50265:

Fire propagation on a vertical single cable.

The single cable is mounted vertically and flamed with a Bunsen burner.

The flame must extinguish itself, at least 50 mm below the upper fixing clamp.

Temperature of burner, duration and angle of flame application, are described in the reference standards.



IEC 60332-3 / EN 50266 / EN 50305 9.1 :


Fire propagation on a vertical cables bundle.

A certain number of cable samples are fixed on a 3.5m long ladder, and flamed with an appropriate burner.

The samples number, the duration of flame application, and the power/temperature of burner are described in the reference standards. After flame application, the visible area of fire damage must not exceed 2.5 m in height from the bottom of the burner.

The volume of tested material define a differentiation in categories:

- A/FR Part 3-21 7 l/m
- A Part 3-22 7 l/m
- B Part 3-23 3.5 l/m
- C Part 3-24 1.5 l/m
- D Part 3-25 0.5 l/m

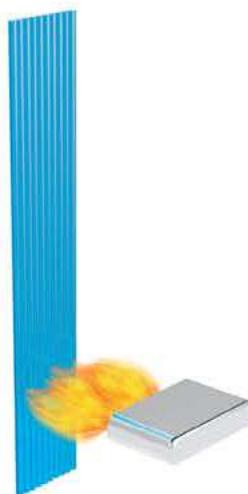


IEC 60331 / EN 50200 / EN 50362 : Fire test resistance.

A sample of cable is horizontally applied supported by metal rings, or in U shape fixed on a fireproof wall.

Through using a gas burner the cable It's maintained in flame contact for a certain time.

The test and the temperature of burner are described in the reference standards. In U shape test, the fireproof wall is hit every five minutes by a mechanical shock, to simulate a potential collapse during the fire.

The time of fire application, and the temperature of flame are described in the reference standards (typical 750°C or 830°C). During the test a current for continuity checking is passed through all conductors of the cable and the voltage must be maintained during the test duration.

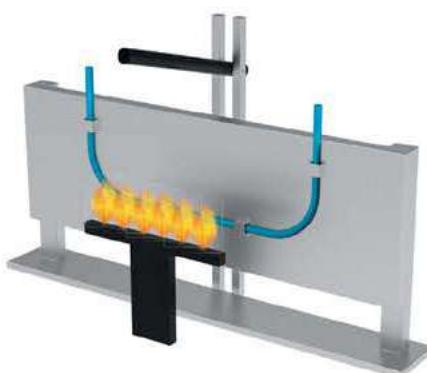

IEC 61034-1/2 / EN 50268-1/2: Measurement of smoke density of cables burning under defined conditions.

A few samples of cable are burnt in a cubic (3x3x3m) chamber using a flammable liquid.

The light transmittance of the resulting smoke is measured using an optical light detector. The test duration is about 40 minutes, depending by the quantity and composition of the liquid fuel. At the end of the test the light transmittance of the smoke must be 60% minimum.

IEC 60754-1 / EN 50267-2-1/2: Test on gases evolved during combustion of materials from cables - Determination of the halogen acid gas content.

This standard covers the general aspects of potential hazard caused from corrosiveness of smoke and combustion gases.

A small quantity of non-metallic material is heated in a tube, the resulting gases are tested for their halogen content. The flame temperature is $800\text{ }^{\circ}\text{C} \pm 10\text{ }^{\circ}\text{C}$, with a test duration of 40 ± 5 min in total.

The halogen content of non-metallic materials must be less than 0.5% or 5 mg/g.

IEC 60754-2 / EN 50267-2-2: Test on gases evolved during combustion of materials from cables - Determination of acidity (by pH measurement) and conductivity.

A small quantity of non-metallic material is burnt in a furnace, the pH and conductivity combustion gases dissolved in water are measured.

The minimum pH value of the washing water must 4.3, and the maximum conductivity must be 10 $\mu\text{S}/\text{mm}$.



Regulation No. 305/2011 (Construction Products Regulation, or CPR) of the European Parliament and of the European Council is a regulation of 9 March 2011 that lays down harmonised conditions for the marketing of construction products and replaces Construction Products Directive (89/106/EEC). The EU regulation is designed to simplify and clarify the existing framework for the placing on the EU market of construction products.

The main objective of the CPR is the removal of technical barriers to trade in order to guarantee the free movement of construction products within the common internal market due to differing product and test standards, approval processes and conformity documents in the various member states.

After the transition period, which ended on 1 July 2017, the Construction Products Regulation governs cables intended to be incorporated in construction works (permanent installations) in both buildings and civil engineering.

CPR Euroclasses are: Aca, B1ca, B2ca, Cca, Dca, Eca, Fca.



Furthermore, there are additional criteria establishing requirements on the amount of smoke produced, the fall of droplets and flamed particles during combustion, and acid content or toxicity of smoke produced.

- s = smoke production. With decreasing performance, varies from s1 to s3. Furthermore, s1 classification can be classified as s1, s1a or s1b on the basis of smoke opacity.
- d = flaming droplets. With decreasing performance, varies from d0 to d2
- a = smoke acidity. With decreasing performance, varies from a1 to a3

The DoP (Declaration of Performance) is a document issued by the manufacturer in which all relevant information is recorded: the manufacturer, cable identification, evaluation system used, applicable standard, CPR certification body and performance of the product.

We are committed to adopting Euroclasses, and their relevant DoP, to express the fire performance of our products for the different construction applications, even if incumbent operators' specifications eventually conflict with the CPR Regulations.


> SCMT EUROBALISE - TRACKSIDE SUBSYSTEM CABLES



The images are for illustrative purposes only

TK-SCMT-SST ENCODER BOA _x2x0.9

ON REQUEST

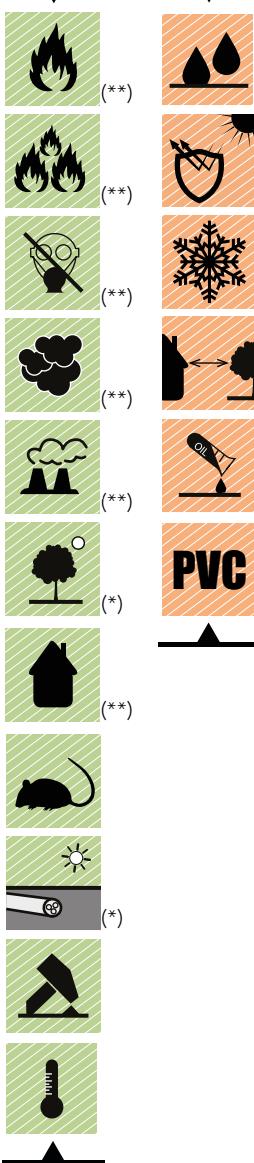

CABLE SPECIFICATIONS

Conductor Insulation Pair

Solid bare copper, 0.9 mm
Coloured Polyethylene
Two conductors assembled to form a pair

Total Assembling

N° pairs assembled together with eventual filler and tape

Armouring

Corrugated steel tape thermowelded to outer sheath

Outer sheath

Green flame retardant, low smoke and halogen-free compound or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2
IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

3000 V DC x 1 minute

Characteristic impedance @ 20 to 50 KHz

130 ± 10 Ω

Mutual capacitance @ 800 Hz

≤ 50 pF/m

Capacitance unbalance

≤ 400 pF/500m

Max attenuation @ 20 to 50 KHz

2 dB/km

ON REQUEST

Filling compound

UV resistant

Arctic cables

Indoor/Outdoor

Oil resistant

PVC version

MAIN FEATURES


Formation	Conductor diameter Ø	Resistance of conductor @20°C	Insulation resistance @20°C	Outer sheath nominal thickness	Outer sheath nominal Ø	Nominal weight	PE	LSZH
(n° of pairs)	(mm)	(Ω/km)	(GΩ/km)	(mm)	(mm)	(kg/km)		
1	0.9	≤ 28.4	≥ 10	1.5	9.5	90	115	
2	0.9	≤ 28.4	≥ 10	1.5	12.0	120	160	
4	0.9	≤ 28.4	≥ 10	1.5	14.0	150	210	
10	0.9	≤ 28.4	≥ 10	1.5	18.0	280	360	

CPR

B2ca - s1a, d1, a1

TK-SCMT-SST 1x2x1.4

ON REQUEST

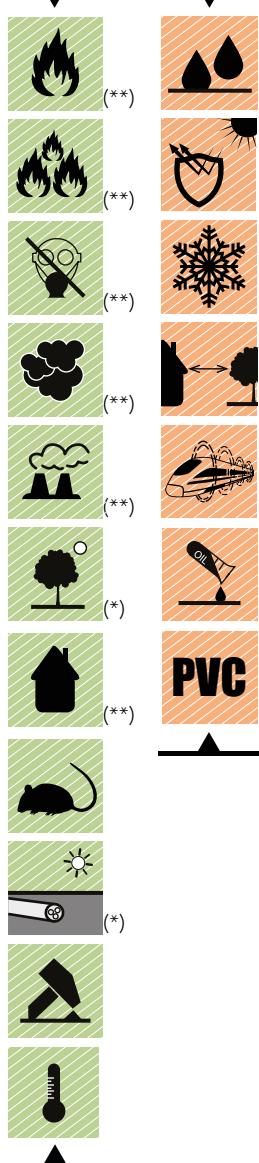

(*) Only for PE version

(**) Only for LSZH version

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Screen and moisture barrier Inner sheath

Armouring Outer sheath

Outer diameter

Solid bare copper, 1.4 mm

Coloured foam Polyolefin

Two conductors assembled to form a pair with eventual filler and tape

Aluminium/PE/tape thermowelded to inner sheath + drain wire

Flame retardant, low smoke and

halogen-free compound or Polyethylene

Two steel tapes helically applied

Green flame retardant, low smoke and halogen-free compound or black Polyethylene

12.8 mm

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C ≤ 12.1 Ω/km

Insulation resistance @ 20 °C ≥ 10 GΩ x km

Test voltage 3000 V AC x 1 minute

**Characteristic impedance @ 8.9 KHz
@ 560 KHz** 130 Ω
102 Ω

Mutual capacitance @ 800 Hz ≤ 45 pF/m

Capacitance unbalance ≤ 3000 pF/km

**Max attenuation @ 8.9 KHz
@ 560 KHz** ≤ 0.9 dB/km
≤ 5.5 dB/km

Nominal weight 285 kg/km (*)
220 kg/km (**)

ON REQUEST


Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Reduction factor
Oil resistant
PVC version

CPR

B2ca - s1a, d1, a1

TK-SCMT-SST 1x2x1.6

ON REQUEST

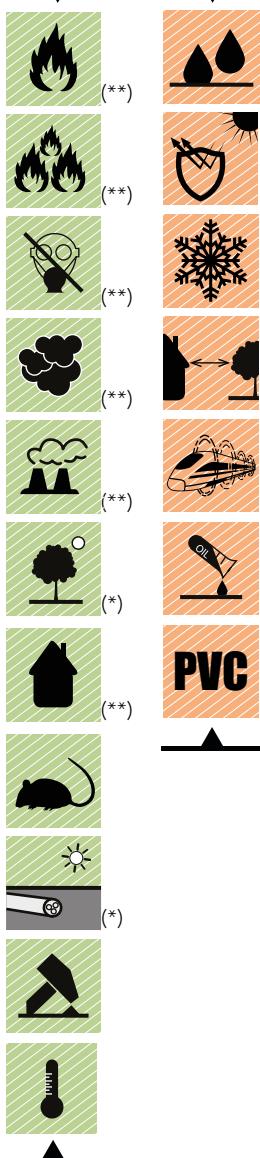

(*) Only for PE version
(**) Only for LSZH version

CABLE SPECIFICATIONS

Conductor	Solid bare copper, 1.6 mm
Insulation	Coloured foam Polyolefin
Assembling	Two conductors assembled to form a pair with filler and tape
Inner sheath	Natural Polyethylene
Screen and moisture barrier	Aluminium/PE/tape thermowelded to intermediate sheath + drain wire
Intermediate sheath	Flame retardant, low smoke and halogen-free compound or Polyethylene
Armouring	Two steel tapes helically applied
Outer sheath	Black flame retardant, low smoke and halogen-free compound or black Polyethylene
Outer diameter	16.5 mm

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 61034-1/2
Halogen-free	IEC 60754-1/2
Fumes	No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C	≤ 9.3 Ω/km
Insulation resistance @ 20 °C	≥ 10 GΩ x km
Test voltage	3000 V AC x 1 minute
Characteristic impedance @ 8.9 KHz	130 Ω
@ 560 KHz	110 Ω
Mutual capacitance @ 800 Hz	≤ 39 pF/m
Capacitance unbalance	≤ 3000 pF/km
Max attenuation @ 8.9 KHz	0.7 dB/km
@ 560 KHz	3.8 dB/km
Inductance @ 8.9 KHz	≤ 0.65 µH/m
@ 560 KHz	≤ 0.50 µH/m
Nominal weight	420 kg/km (*) 360 kg/km (**)

ON REQUEST


Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Reduction factor
Oil resistant
PVC version

CPR

B2ca - s1a, d1, a1

TK-BOA EUROBALISE 1x2x1.02

ON REQUEST

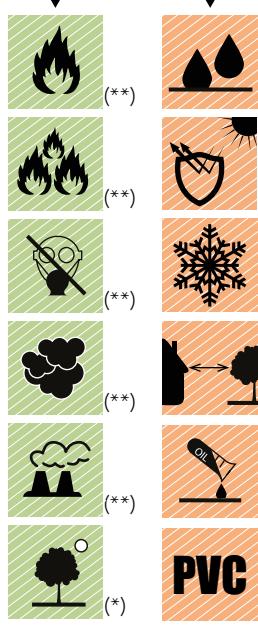

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Screen and moisture barrier Inner sheath

Armouring

Outer sheath

Outer diameter

Solid Bare Copper, 1.02 mm

Coloured Polyethylene

Two conductors assembled to form a pair with eventual filler and tape

Aluminium/PE/tape thermowelded to inner sheath

Flame retardant, low smoke and halogen-free compound or Polyethylene

Corrugated steel tape thermowelded to outer sheath

Green flame retardant, low smoke and halogen-free compound or black Polyethylene

14 mm

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20°C ≤ 21.5 Ω/km

Insulation resistance @ 20°C ≥ 10 GΩ x km

Test voltage 1500 V DC x 1 minute

Characteristic impedance @ 1 MHz 115 Ω

Mutual capacitance @ 800 Hz 44 pF/m

Max attenuation @ 8.8 KHz ≤ 1.7 dB/km

@ 560 KHz ≤ 7.0 dB/km

@ 1000 KHz ≤ 9.5 dB/km

Nominal weight 160 kg/km (*)
220 kg/km (**)

ON REQUEST

Filling compound

UV resistant

Arctic cables

Indoor/Outdoor

Oil resistant

PVC version

Reduction factor


CPR

B2ca - s1a, d1, a1

Cca - s1b, d1, a1

TK-TX/RX CDB AUDIOFREQUENCY TRACK CIRCUIT

ON REQUEST

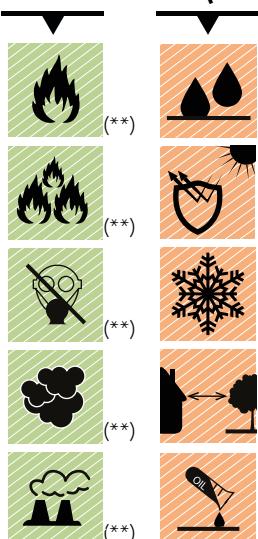

CABLE SPECIFICATIONS

Conductor	Stranded bare copper 1.5 or 2.5mm ² Class2
Insulation	Coloured Polyethylene
Assembling	One two pairs (star quad)
Screen and moisture barrier	Aluminium
Inner sheath	Flame retardant, low smoke and halogen free compound od Polyethylene
Armouring	Two steel tapes helically applied
Outer sheath	Green flame retardant, low smoke and halogen-free compound or black Polyethylene
Outer diameter	16 mm (1 pair 1.5mm ²) 16.5 mm (2 pair 1.5mm ²) 17.5 mm (2 pair 2.5mm ²)

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C	≤ 12.1 Ω/km (1.5mm ²) ≤ 7.4 Ω/km (2.5mm ²)
Insulation resistance @ 20 °C	≥ 5 GΩ x km
Test voltage	3000 V DC x 1 minute
Characteristic impedance @ 1 KHz	110 Ω
Mutual capacitance @ 800 Hz	≤ 45 pF/m
Capacitance unbalance	≤ 200 pF/250m
Max attenuation @ 4.1 KHz @ 9.5 KHz	≤ 0.76 dB/km ≤ 1.05 dB/km
Nominal weight	330 kg/km (1 pair 1.5mm ²) (*) 400 kg/km (1 pair 1.5mm ²) (**) 370 kg/km (2 pair 1.5mm ²) (*) 450 kg/km (2 pair 1.5mm ²) (**) 410 kg/km (2 pair 2.5mm ²) (*) 510 kg/km (2 pair 2.5mm ²) (**)
Reduction factor @ 50 KHz @ 50÷250 V/km	≤ 0.6

ON REQUEST


- Filling compound
- UV resistant
- Arctic cables
- Indoor/Outdoor
- Oil resistant
- PVC version

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

TK-BALISE CABLE

ON REQUEST

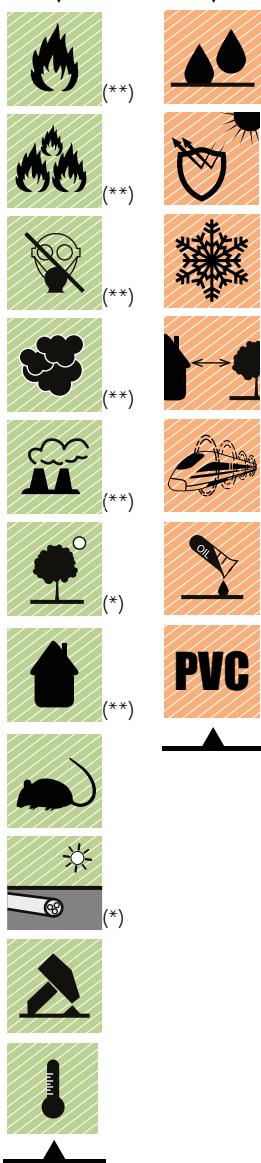

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Solid bare copper, 1.53 mm
Coloured foam Polyethylene
Two conductors assembled to form a pair with filler and tape or 4 conductors assembled to form a star quad 1x2x1.53 or 1x4x1.53

Inner sheath

Screen and moisture barrier

Intermediate sheath

Armouring

Outer sheath

Outer diameter

Black Polyethylene
Aluminium/PE/tape thermowelded to intermediate sheath + drain wire
Flame retardant, low smoke and halogen-free compound or Polyethylene
Two steel tapes helically applied
Black flame retardant, low smoke and halogen-free compound or black Polyethylene
17 mm (2x1.53 mm)
17.5 (4x1.5 mm)

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

Smoke density

IEC 60332-3-24

Halogen-free

IEC 61034-1/2

Fumes

IEC 60754-1/2

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C ≤ 9.9 Ω/km

Insulation resistance @ 20 °C ≥ 10 GΩ x km

Test voltage 2500 V AC x 1 minute

Characteristic impedance @ 8.9 KHz 147 Ω
@ 560 KHz 120 Ω

Mutual capacitance @ 800 Hz ≤ 43 pF/m

Max attenuation @ 8.9 KHz 0.8 dB/km
@ 560 KHz 4.2 dB/km

Nominal weight 350 kg/km (1 pair) (*)
400 kg/km (1 quad) (*)
420 kg/km (1 pair) (**)
470 kg/km (1 quad) (**)

ON REQUEST


Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Reduction factor
Oil resistant
PVC version

CPR

B2ca - s1a, d1, a1

TK-CDB AUDIOFREQUENCY MULTIPAIRS 1.4 TRACK CIRCUIT

ON REQUEST

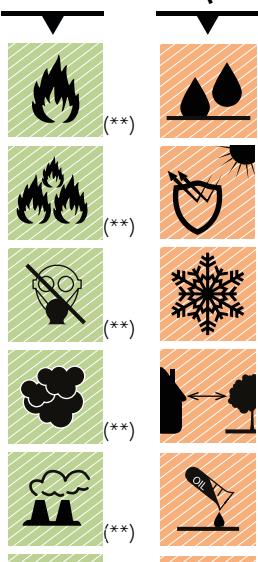

PVC

CABLE SPECIFICATIONS

Conductor	Solid bare copper, 1.4 mm Solid Bare Copper, 0.6 mm (Service pair)
Insulation Assembling	Coloured Polyethylene
Inner sheath	One or two pairs + service pair assembled together
Screen and moisture barrier	Polyethylene
Intermediate sheath	Aluminium/PE/tape thermowelded to intermediate sheath
Armouring	Flame retardant, low smoke and halogen-free compound or Polyethylene
Outer sheath	Two steel tapes helically applied
Outer diameter	Green flame retardant, low smoke and halogen-free compound or black Polyethylene 17 mm (1 pair) 21 mm (2 pairs)

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version


Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C	≤ 12.1 Ω/km
Insulation resistance @ 20 °C	≥ 5 GΩ x km
Test voltage	3000 V DC x 1 minute
Characteristic impedance @ 1 KHz	110 Ω
Mutual capacitance @ 800 Hz	≤ 45 pF/m
Capacitance unbalance	≤ 400 pF/500m
Max attenuation @ 4.1 KHz @ 9.5 KHz	≤ 0.76 dB/km ≤ 1.05 dB/km
Nominal weight	380 kg/km (1 pair) (*) 500 kg/km (2 pairs) (*) 470 kg/km (1 pair) (**) 580 kg/km (2 pairs) (**)
Reduction factor @ 50 KHz @ 50÷250 V/km	≤ 0.8


ON REQUEST

Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

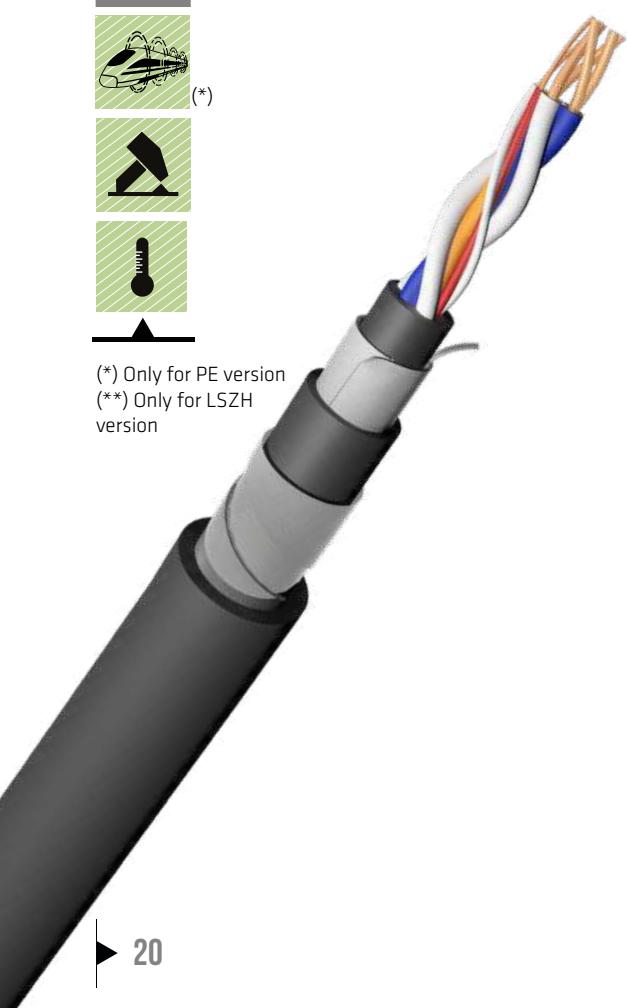

TK-EUROBALISE MULTIPAIRS 0.9

ON REQUEST

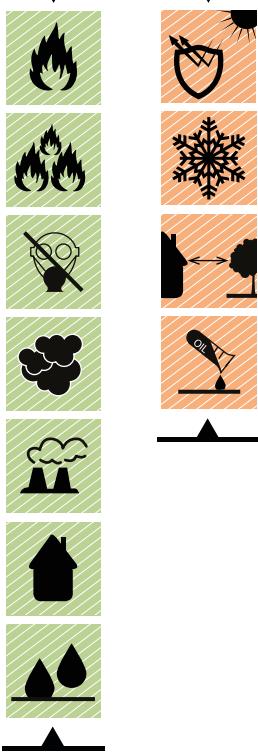

CABLE SPECIFICATIONS

Conductor	Solid bare copper, 0.90 mm
Insulation	Coloured Polyethylene
Filling	Waterblock yarn (dry core)
Pair	2 conductors assembled to form a pair
Total Assembling	N° pairs assembled together with eventual filler and tape
Screen and moisture barrier	Aluminium/PE/tape thermowelded to outer sheath + drain wire
Inner sheath	Green flame retardant, low smoke and halogen-free compound
Outer sheath	Green flame retardant, low smoke and halogen-free compound

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	10xØ

FIRE PERFORMANCE

Fire propagation	IEC 60332-1-2 IEC 60332-3-24
Smoke density	IEC 61034-1/2
Halogen-free	IEC 60754-1/2
Fumes	No corrosive and toxic fumes

MAIN FEATURES

Test voltage	1500 V DC x 1 minute
Characteristic impedance @ 1 MHz	125 Ω
Mutual capacitance @ 800 Hz	45 pF/m
Max attenuation @ 8.8 KHz	≤ 1.7 dB/km
@ 100 KHz	≤ 3.1 dB/km
@ 1000 KHz	≤ 10 dB/km

ON REQUEST


UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant

MAIN FEATURES

Formation	Conductor diameter Ø	Resistance of conductor @20 °C	Insulation resistance @20 °C	Outer sheath nominal thickness	Outer sheath nominal Ø	Nominal weight LSZH
(n° of pairs)	(mm)	(Ω/km)	(GΩxkm)	(mm)	(mm)	(kg/km)
2	0.9	≤ 28.4	≥ 10	1.5	14.0	180
4	0.9	≤ 28.4	≥ 10	1.5	15.0	250
7	0.9	≤ 28.4	≥ 10	1.5	18.0	320
10	0.9	≤ 28.4	≥ 10	1.5	20.0	420

TK-EUROBALISE MULTIPAIRS 0.9 ARMoured

ON REQUEST

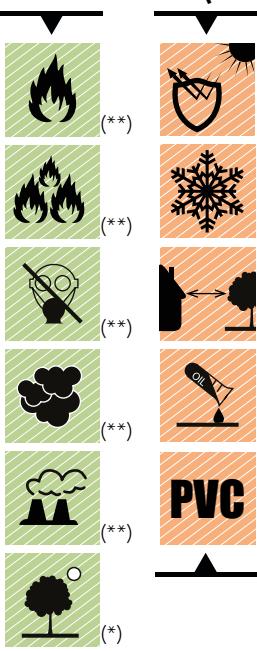

CABLE SPECIFICATIONS

Conductor	Solid bare copper, 0.90mm
Insulation	Coloured foam Polyethylene
Filling	Petroleum jelly
Pair	Two conductors assembled to form a pair
Total Assembling	N° pairs assembled together with eventual filler and tape
Screen and moisture barrier	Aluminium/PE/tape thermowelded to inner sheath + drain wire
Inner sheath	Flame retardant, low smoke and halogen-free compound or Polyethylene
Armouring	Corrugated steel tape thermowelded to outer sheath
Outer sheath	Green flame retardant, low smoke and halogen-free compound of black Polyethylene

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage	1500 V DC x 1 minute
Characteristic impedance @ 1 MHz	125 Ω
Mutual capacitance @ 800 Hz	45 pF/m
Max attenuation @ 8.8 KHz	≤ 1.7 dB/km
@ 100 KHz	≤ 3.1 dB/km
@ 1000 KHz	≤ 10 dB/km

ON REQUEST


UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

MAIN FEATURES


Formation	Conductor diameter Ø	Resistance of conductor @20°C	Insulation resistance @20°C	Outer sheath nominal thickness	Outer sheath nominal Ø	Nominal weight PE	Nominal weight LSZH
(n° of pairs)	(mm)	(Ω/km)	(GΩ/km)	(mm)	(mm)	(kg/km)	
2	0.9	≤ 28.4	≥ 10	1.2	15.5	220	240
4	0.9	≤ 28.4	≥ 10	1.2	16.5	270	300
7	0.9	≤ 28.4	≥ 10	1.2	19.0	350	390
10	0.9	≤ 28.4	≥ 10	1.3	21.0	450	510

(*) Only for PE version

(**) Only for LSZH version

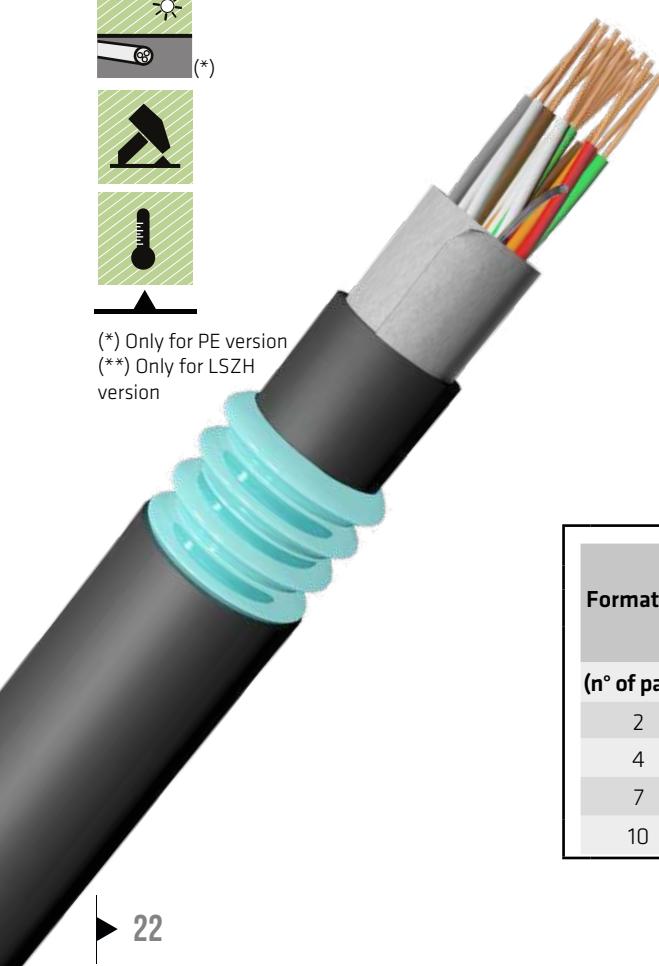


► TELECOMMUNICATION CABLES

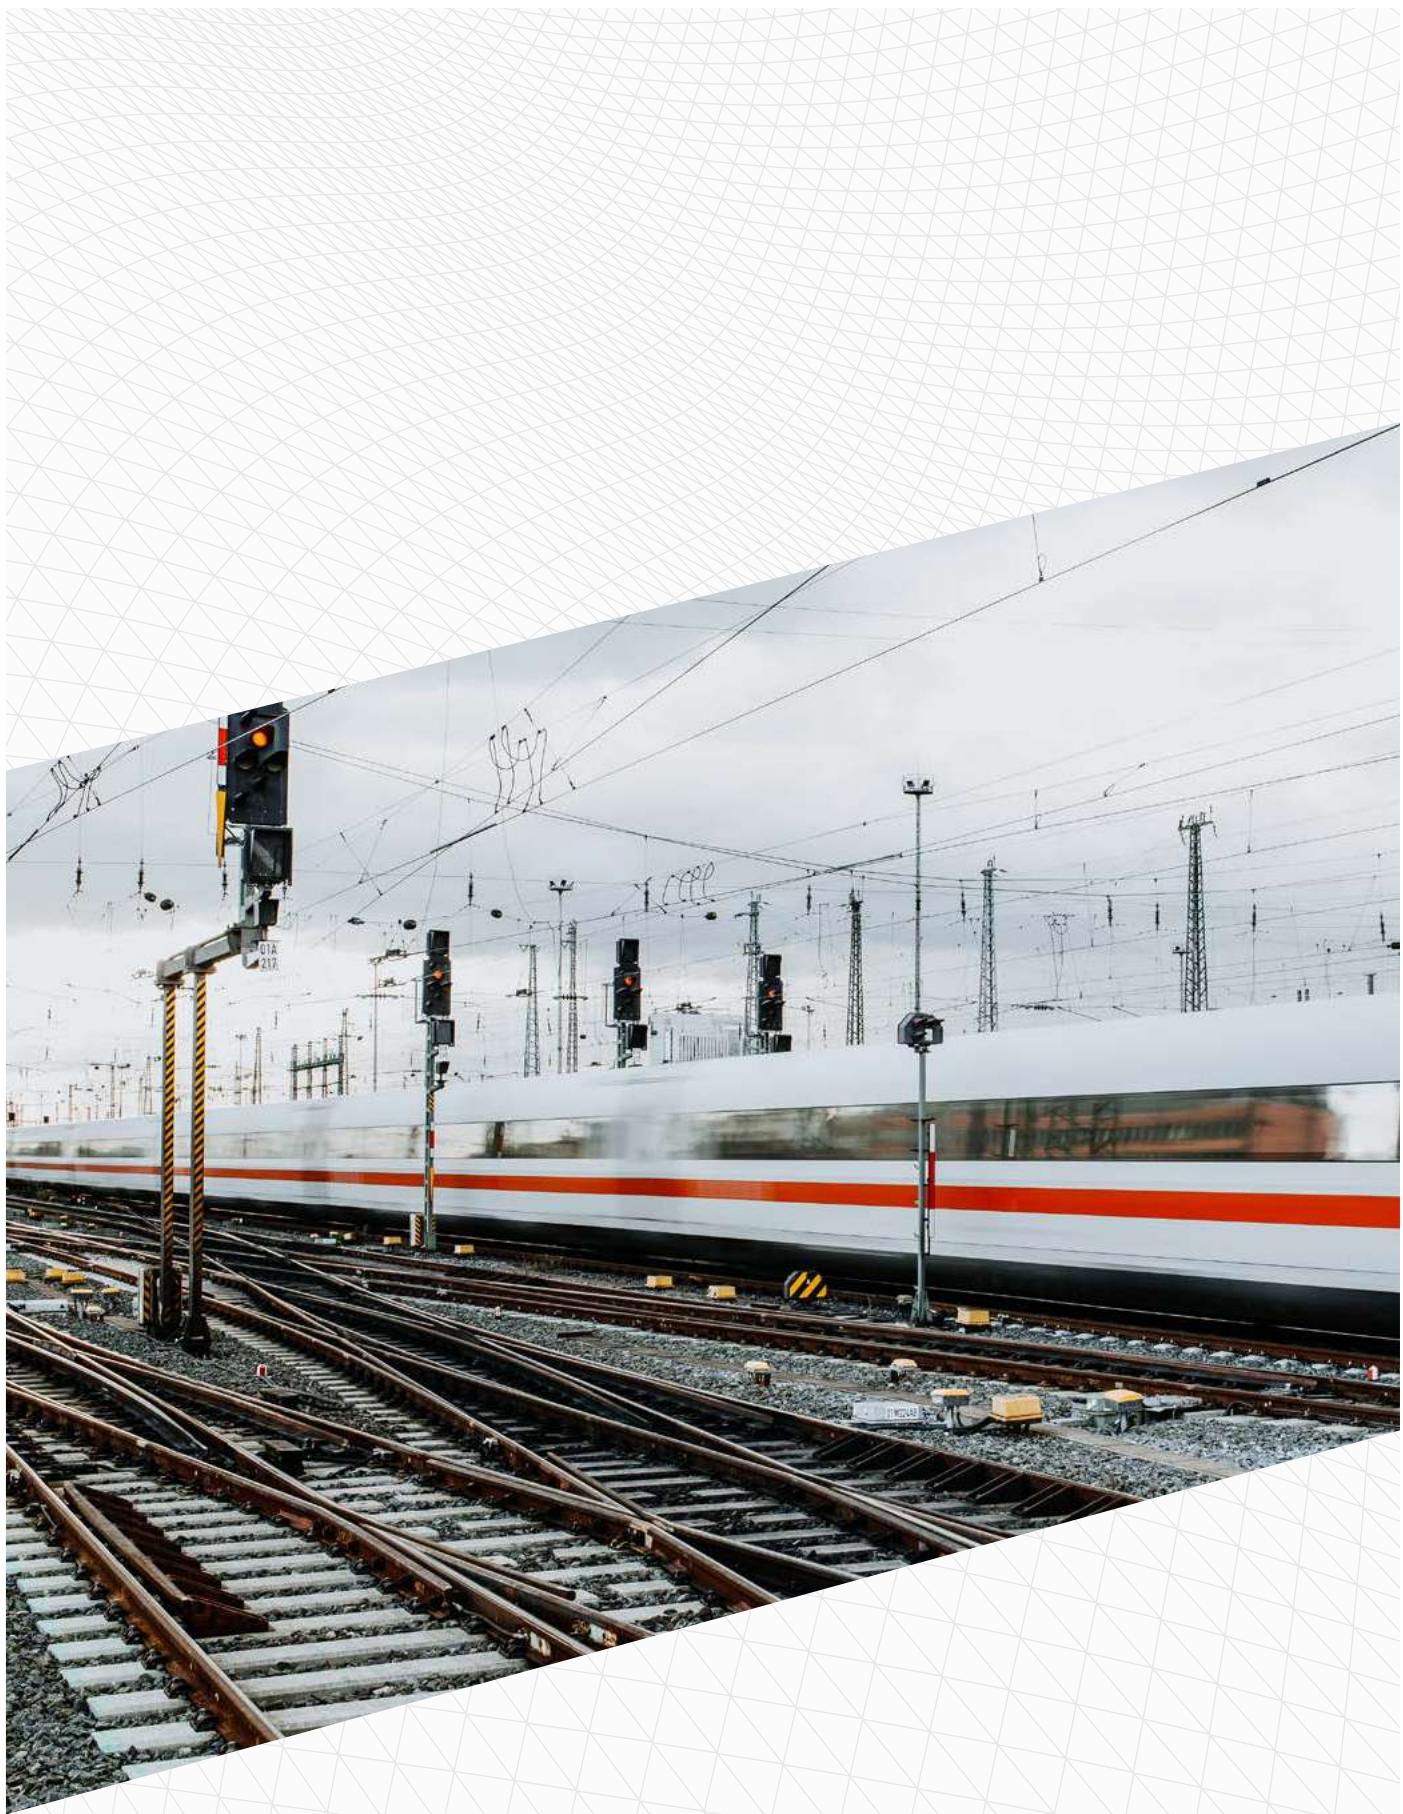

The images are for illustrative purposes only

TK-TELEPHONE MULTIPAIRS 0.7

ON REQUEST

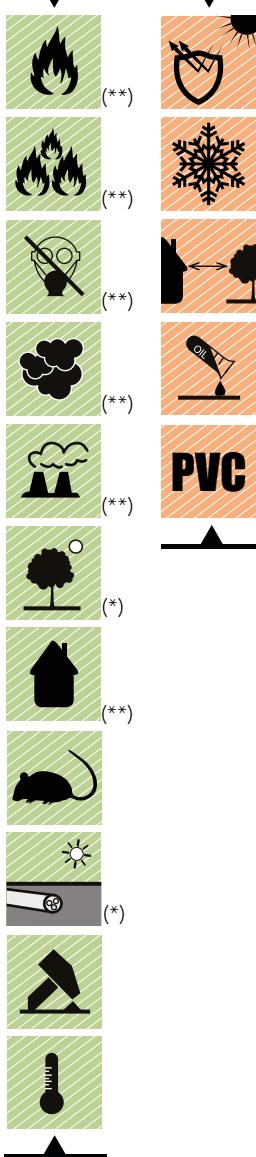

CABLE SPECIFICATIONS

Conductor	Solid bare copper, 0.7 mm
Insulation	Coloured Polyethylene
Pair	2 conductors assembled to form a pair
Total Assembling	4 pairs assembled together with eventual filler and tape
Screen	Aluminium tape + drain wire
Armouring	Corrugated steel tape thermowelded to outer sheath
Outer sheath	Green flame retardant, low smoke and halogen-free or black Polyethylene
Outer diameter	12.5 mm

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C	≤ 47 Ω/km
Insulation resistance @ 20 °C	≥ 5 GΩ x km
Test voltage	2000 V AC x 1 minute
Mutual capacitance @ 800 Hz	≤ 50 pF/m
Capacitance unbalance	≤ 600 pF/500m
Nominal weight	150 kg/km (*) 180 kg/km (**)

ON REQUEST


UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

TK-CANCABLE 2x2x1.3

ON REQUEST

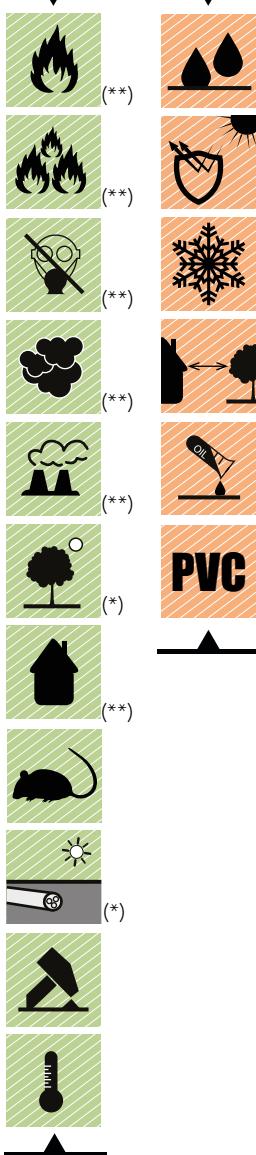

CABLE SPECIFICATIONS

Conductor	Stranded bare copper, 1.3 mm ²
Insulation	Coloured foam Polyolefin
Conductor communication core	Stranded bare copper, 0.5 mm ²
Insulation communication core	Coloured Polyethylene
Assembling	
Screen	Two pairs + 1 communication core assembled together + drain wire
Armouring	Aluminium or Aluminium/Polyester + drain wire
Outer sheath	Corrugated steel tape thermowelded to outer sheath
Outer diameter	Black flame retardant, low smoke and halogen-free or Polyethylene
	16 mm

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	10xØ

FIRE PERFORMANCE

(**) Only for LSZH version


Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C	≤ 14.2 Ω/km
Resistance unbalance	≤ 3%
Insulation resistance @ 20 °C	≥ 5000 MΩ x km
Test voltage	2000 V DC x 1 minute
Mutual capacitance @ 800 Hz	≤ 75 pF/m
Max attenuation @ 60 KHz	≤ 0.88 dB/km
Nominal weight	270 kg/km (*) 320 kg/km (**)


ON REQUEST

Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

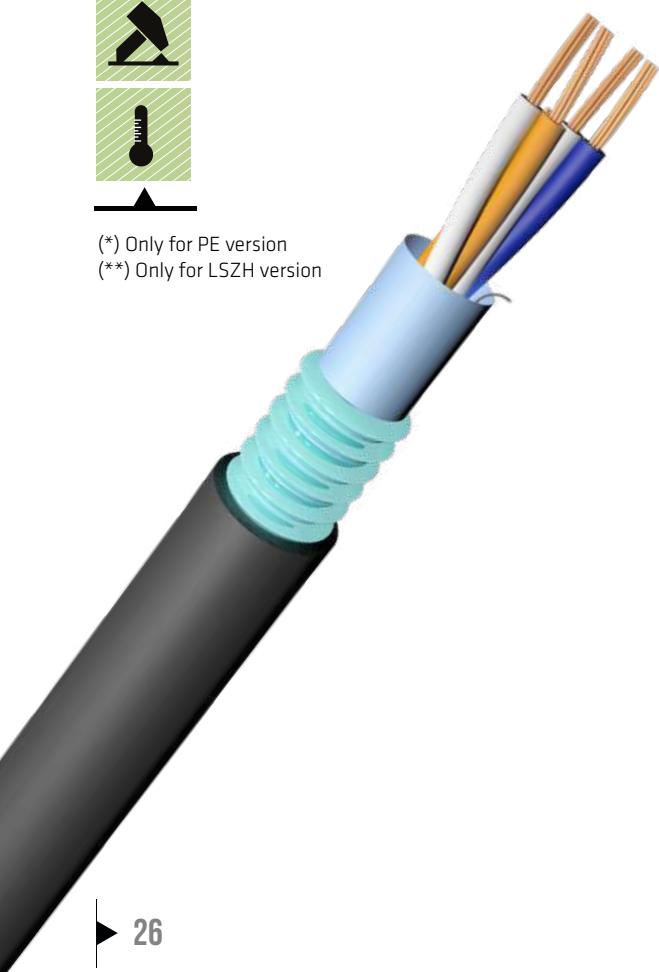

TK-UNBALANCED CURRENT SENSOR 2x2x0.9

ON REQUEST

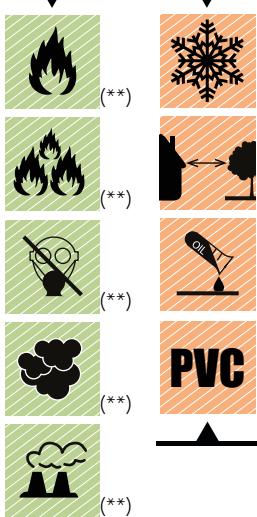

CABLE SPECIFICATIONS

Conductor
Insulation
Pair

Pair screen
Total Assembling

Screen and moisture barrier
Inner sheath

Armouring
Outer sheath

Outer diameter

Solid bare copper, 0.90 mm
Coloured Polyethylene
2 conductors assembled to form a pair

Aluminium/PE tape + drain wire
2 pairs assembled together with eventual filler and tape

Aluminium/PE tape thermowelded to inner sheath

Flame retardant, low smoke and halogen-free or Polyethylene

Steel wire armour (SWA)

Green flame retardant, low smoke and halogen-free or black Polyethylene

19 mm

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C ≤ 28.4 Ω/km

Insulation resistance @ 20 °C ≥ 20 GΩ x km

Test voltage 3000 V AC x 10 minute

Characteristic impedance @ 1 KHz 400 Ω

Mutual capacitance @ 800 Hz ≤ 56 pF/m

Max attenuation @ 1 KHz 0.81 dB/km

Nominal weight @ 800 Hz 470 kg/km (*)
530 kg/km (**)

ON REQUEST


Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

CPR

B2ca - s1a, d1, a1

TK-TELEPHONE MULTIQUADS 0.7

ON REQUEST

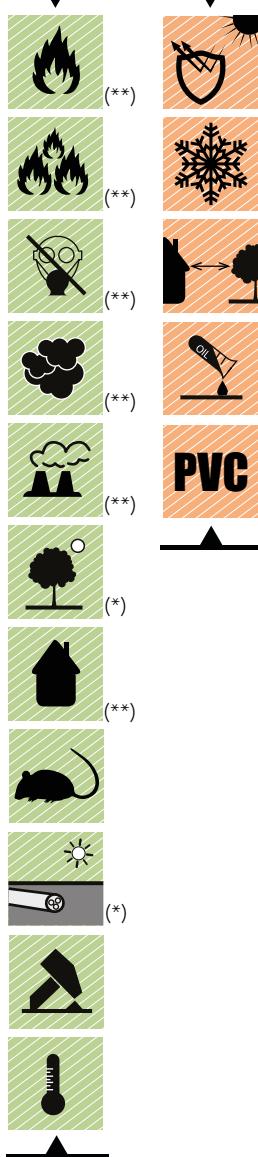

CABLE SPECIFICATIONS

Conductor Insulation Quad

Solid bare copper, 0.7 mm
Coloured Polyethylene
4 conductors assembled together to form a star quad + service quad

Total Assembling

N° star quads assembled with eventual filler and tape

Armouring

Aluminium welded, nominal thickness 1.2mm

Outer sheath

Green flame retardant, low smoke and halogen-free compound or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

30xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

4000 V AC x 1 minute

Mutual capacitance @ 800 Hz

38.5 pF/m

Capacitance unbalance

180 pF/500m

ON REQUEST

UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

MAIN FEATURES


Formation (n° of pairs)	Conductor diameter Ø (mm)	Resistance of conductor @20°C (Ω/km)	Insulation resistance @20°C (GΩ/km)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight PE (kg/km)	Nominal weight LSZH (kg/km)
10	0.7	≤ 47	≥ 10	2.0	17.5	370	410
20	0.7	≤ 47	≥ 10	2.0	21.0	450	600
30	0.7	≤ 47	≥ 10	2.2	23.0	660	720
40	0.7	≤ 47	≥ 10	2.2	24.0	770	880
50	0.7	≤ 47	≥ 10	2.2	27.5	930	1010
100	0.7	≤ 47	≥ 10	2.6	38.0	1600	1750

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

TK-TELEPHONE MULTIQUADS 0.9/1

ON REQUEST

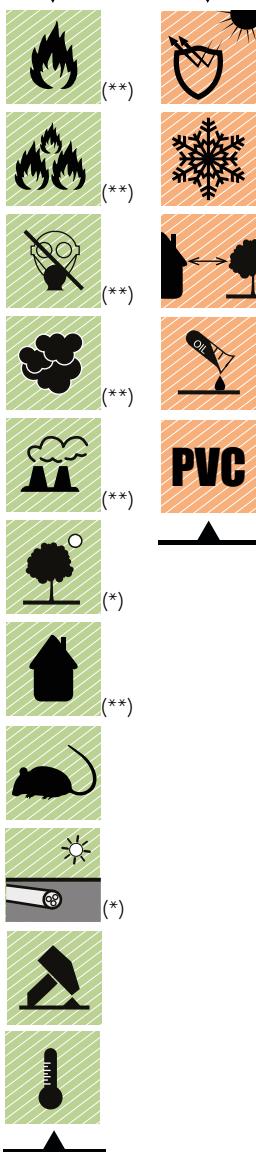

CABLE SPECIFICATIONS

**Conductor
Insulation
Quad**

Solid bare copper, 0.9mm/1mm

Coloured foam Polyolefin

4 conductors assembled together to form a star quad + service quad

Total Assembling

Armouring

N° star quads assembled with eventual filler and tape

Outer sheath

Aluminium welded, nominal thickness 1.2mm

Green flame retardant, low smoke and halogen-free compound or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

30xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

4000 V AC x 1 minute

Mutual capacitance @ 800 Hz

≤ 33 pF/m (0.9 mm)

≤ 38.5 pF/m (1 mm)

Capacitance unbalance

180 pF/500m

ON REQUEST

UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

MAIN FEATURES


Formation	Conductor diameter Ø	Resistance of conductor @20°C	Insulation resistance @20°C	Outer sheath nominal thickness	Outer sheath nominal Ø	Nominal weight	PE	LSZH
(n° of pairs)	(mm)	(Ω/km)	(GΩ/km)	(mm)	(mm)	(kg/km)		
20	0.9	≤ 28.4	≥ 10	2.2	24.0	660	730	
30	0.9	≤ 28.4	≥ 10	2.2	27.5	850	940	
40	0.9	≤ 28.4	≥ 10	2.4	30.5	1060	1170	
50	0.9	≤ 28.4	≥ 10	2.4	33.0	1270	1380	
40	1.0	≤ 23	≥ 10	2.4	30.5	1150	1270	
50	1.0	≤ 23	≥ 10	2.4	33.0	1400	1510	

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

CPR

TK-PZB INDUSI AUTOMATIC TRAIN CONTROL 4x0.75

ON REQUEST

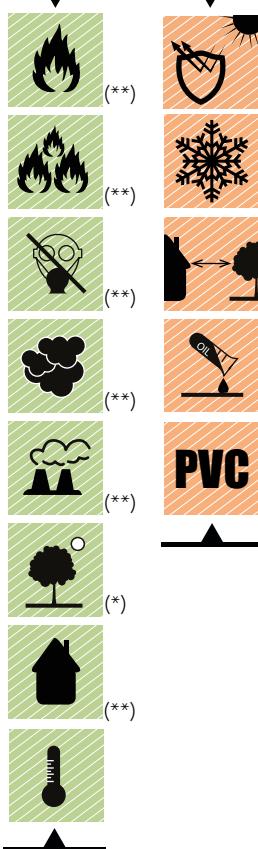

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Stranded bare copper, 0.75 mm²

Coloured Polyethylene

4 conductors assembled together to form a star quad with eventual filler and tape

Inner sheath

Flame retardant, low smoke and halogen-free or Polyethylene

Aluminium/PE/tape thermowelded to outer sheath

Screen and moisture barrier

Green flame retardant, low smoke and halogen-free or black Polyethylene

Outer sheath

14.5 mm

Outer diameter

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C

≤ 26 Ω/km

Insulation resistance @ 20 °C

≥ 5 GΩ x km

Test voltage

2500 V AC x 1 minute

Mutual capacitance @ 800 Hz

≤ 38 pF/m


Nominal weight

180 kg/km (*)

215 kg/km (**)


ON REQUEST

UV resistant
Arctic cables
Indoor/Outdoor
Oil Resistant
PVC version

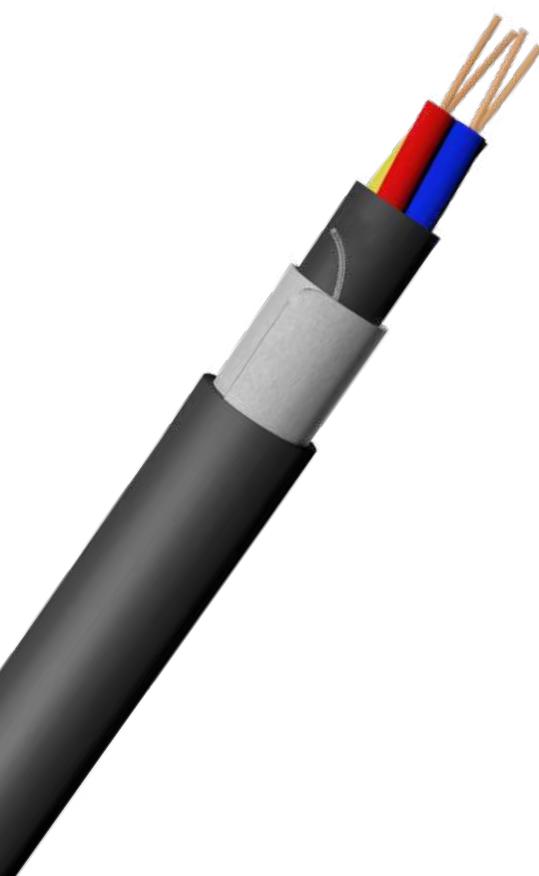

TK-ARMoured PZB INDUSI AUTOMATIC TRAIN CONTROL 4x0.8

ON REQUEST

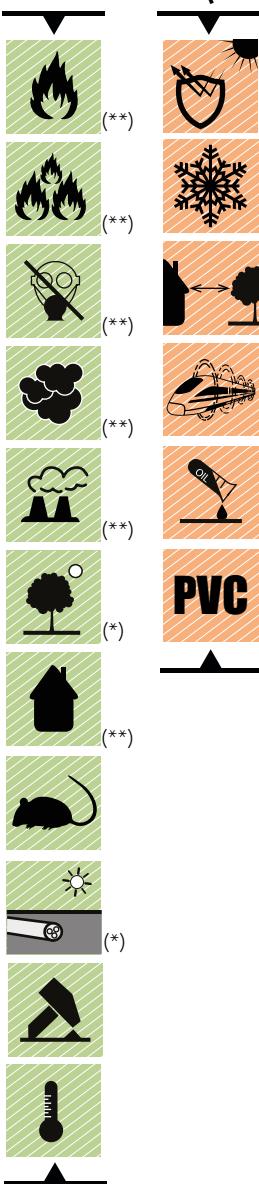

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Solid bare copper, 0.80 mm
 Coloured Foam Polyolefin
 4 conductors assembled together to form a star quad with eventual filler and tape

Screen and moisture barrier Inner sheath

Aluminium/PE/tape thermowelded to inner sheath

Armouring Outer sheath

Flame retardant, low smoke and halogen-free or Polyethylene
 Two steel tapes helically applied

Outer diameter

Green flame retardant, low smoke and halogen-free or black Polyethylene
 15 mm

TECHNICAL DATA

Operating temperature Minimum bending radius

- 40 °C ÷ + 70 °C
 20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2
 IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C ≤ 38 Ω/km

Insulation resistance @ 20 °C ≥ 5 GΩ x km


Test voltage 2500 V AC x 1 minute

Mutual capacitance @ 800 Hz ≤ 30 pF/m

Nominal weight 250 kg/km (*)
 330 kg/km (**)


ON REQUEST

UV resistant
 Arctic cables
 Indoor/Outdoor
 Reduction factor
 Oil resistant
 PVC version

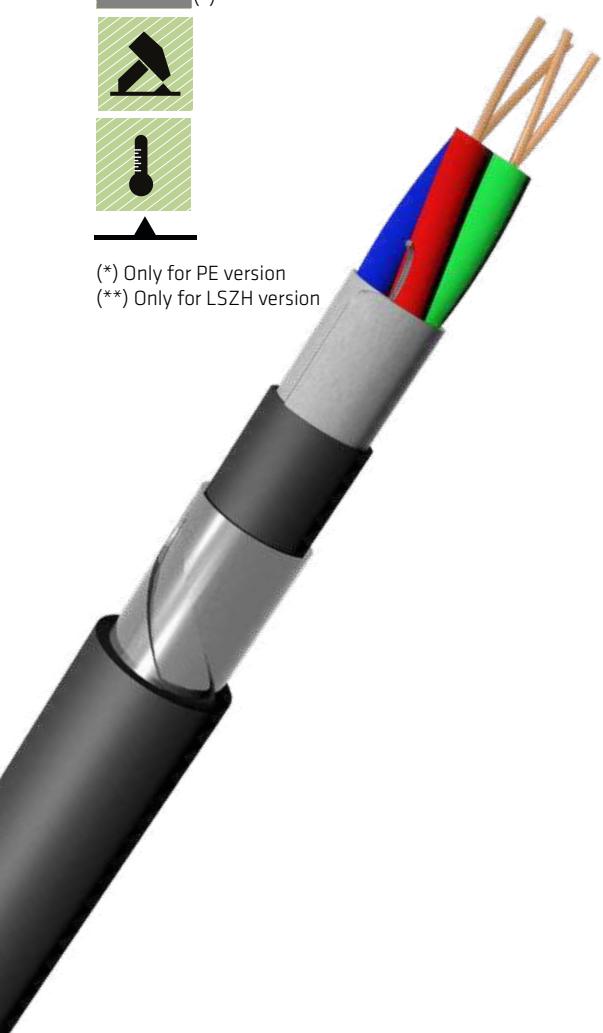

TK-LAN S/FTP CABLE

ON REQUEST

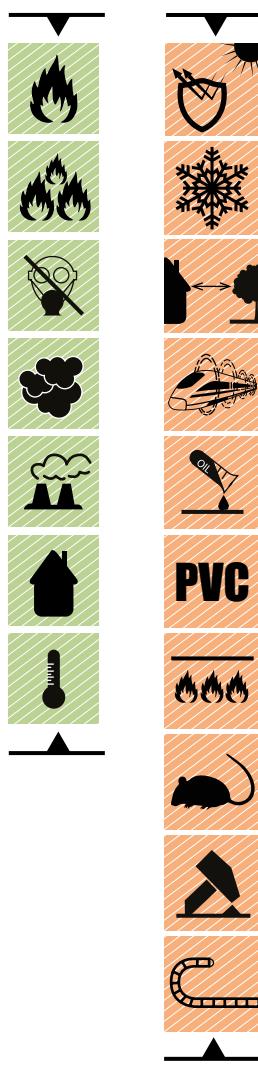

CABLE SPECIFICATIONS

Conductor	Stranded bare copper 23 AWG
Insulation	Coloured Polyolefin
Core identification	<ol style="list-style-type: none"> 1. White - Blue 2. White - Orange 3. White - Green 4. White - Brown
Individual pairs screen	Aluminium/polyester tape
Overall screen	Tinned copper braid
Outer sheath	Flame retardant, low smoke and halogen-free
Outer diameter	8.6 mm

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	10xØ
Conductor resistance	≤ 69.5 Ω/km
Nominal capacitance	55 pF/m
Characteristic Impedance	@ 100 MHz: 100 ± 5 Ω

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

ARMoured VERSION



Material

Outer diameter

Galvanized steel wire braid (GSWB)
Tinned copper wire braid (TCWB)

12 mm

ON REQUEST

UV resistant
Arctic cables
Indoor/Outdoor
Oil Resistant
PVC version
Fire Resistant
Special version for JUMPER application

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

TK-LAN S/FTP CABLE

TRANSMISSION CHARACTERISTICS CATEGORY 6A (IEC 61156-6)

Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	250	500
Maximum Attenuation	dB/100	3.12	5.70	8.89	11.23	12.57	15.75	22.48	28.70	36.13	41.36	46.60	67.89
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	250	500
Minimum Return Loss	dB		23.01	25.00	25.00	25.00	23.33	20.74	18.99	17.35	16.40	15.60	15.60
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	250	500
Minimum NEXT	dB	75.30	66.27	60.30	57.24	55.78	52.88	48.36	45.30	42.45	40.78	39.33	34.82
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	250	500
Minimum PS-NEXT	dB	72.30	63.27	57.30	54.24	52.78	49.88	45.36	42.30	39.45	37.78	36.33	31.82

TRANSMISSION CHARACTERISTICS CATEGORY 7 (IEC 61156-6)


Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600
Maximum Attenuation	dB/100	3.02	5.61	8.78	11.12	12.44	15.62	22.32	28.53	35.96	41.20	51.28	75.15
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600
Minimum Return Loss	dB		23.01	25.00	25.00	25.00	23.33	20.74	18.99	17.35	16.40	15.60	15.60
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600
Minimum NEXT	dB	78.00	78.00	78.00	78.00	78.00	78.00	75.46	72.40	69.55	67.88	65.24	60.73
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600
Minimum PS-NEXT	dB	75.00	75.00	75.00	75.00	75.00	75.00	72.46	69.40	66.55	64.88	62.24	57.73

TRANSMISSION CHARACTERISTICS CATEGORY 7A (IEC 61156-6)

Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600	1000
Maximum Attenuation	dB/100	3.01	5.58	8.71	11.00	12.29	15.38	21.58	27.78	34.80	39.70	49.03	70.65	92.89
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600	1000
Minimum Return Loss	dB		23.01	25.00	25.00	25.00	23.33	20.74	18.99	17.35	16.40	15.60	15.60	13.69
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600	1000
Minimum NEXT	dB	78.00	78.00	78.00	78.00	78.00	78.00	78.00	78.00	75.55	73.88	71.24	66.73	63.40
Frequency	MHz	1	4	10	16	20	31.25	62.5	100	155	200	300	600	1000
Minimum PS-NEXT	dB	75.00	75.00	75.00	75.00	75.00	75.00	75.00	75.00	72.55	70.88	68.24	63.73	60.40

TK-ARMoured 4 PAIRS AWG18

ON REQUEST

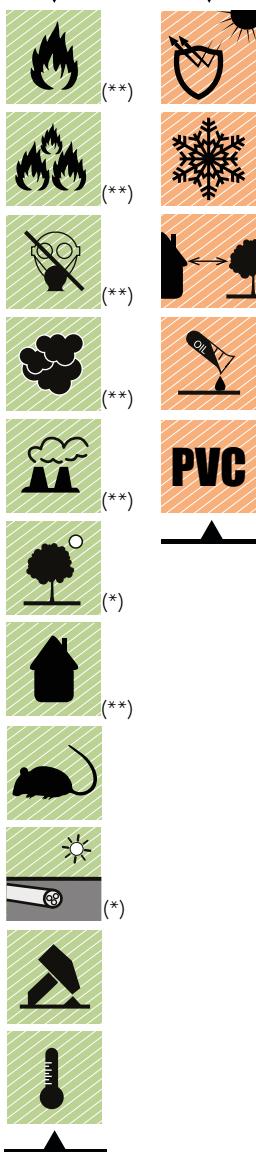

CABLE SPECIFICATIONS

Conductor	Solid bare copper, 18 AWG
Insulation	Coloured Polyethylene
Pair	2 conductors assembled to form a pair
Total Assembling	4 pairs assembled together with eventual filler and tape
Screen	Aluminium/Mylar tape + drain wire
Inner sheath	Flame retardant, low smoke and halogen-free or Polyethylene
Armouring	Corrugated steel tape thermowelded to outer sheath
Outer sheath	Green flame retardant, low smoke and halogen-free or black Polyethylene
Outer diameter	15 mm

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

IEC 60332-3-24

IEC 61034-1/2

IEC 60754-1/2

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C ≤ 23 Ω/km

Insulation resistance @ 20 °C ≥ 5 GΩ x km

Test voltage 2000 V AC x 1 minute

Mutual capacitance @ 800 Hz ≤ 50 pF/m

Characteristic Impedance at 1÷100 MHz 100 ± 15 Ω

Nominal attenuation @ 1 MHz	2.0 dB/100m
@ 10 MHz	4.0 dB/100m
@ 100 MHz	12.0 dB/100m

Nominal weight	280 kg/km (*)
	320 kg/km (**)


ON REQUEST

UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

CPR

B2ca - s1a, d1, a1


> SIGNALLING CABLES

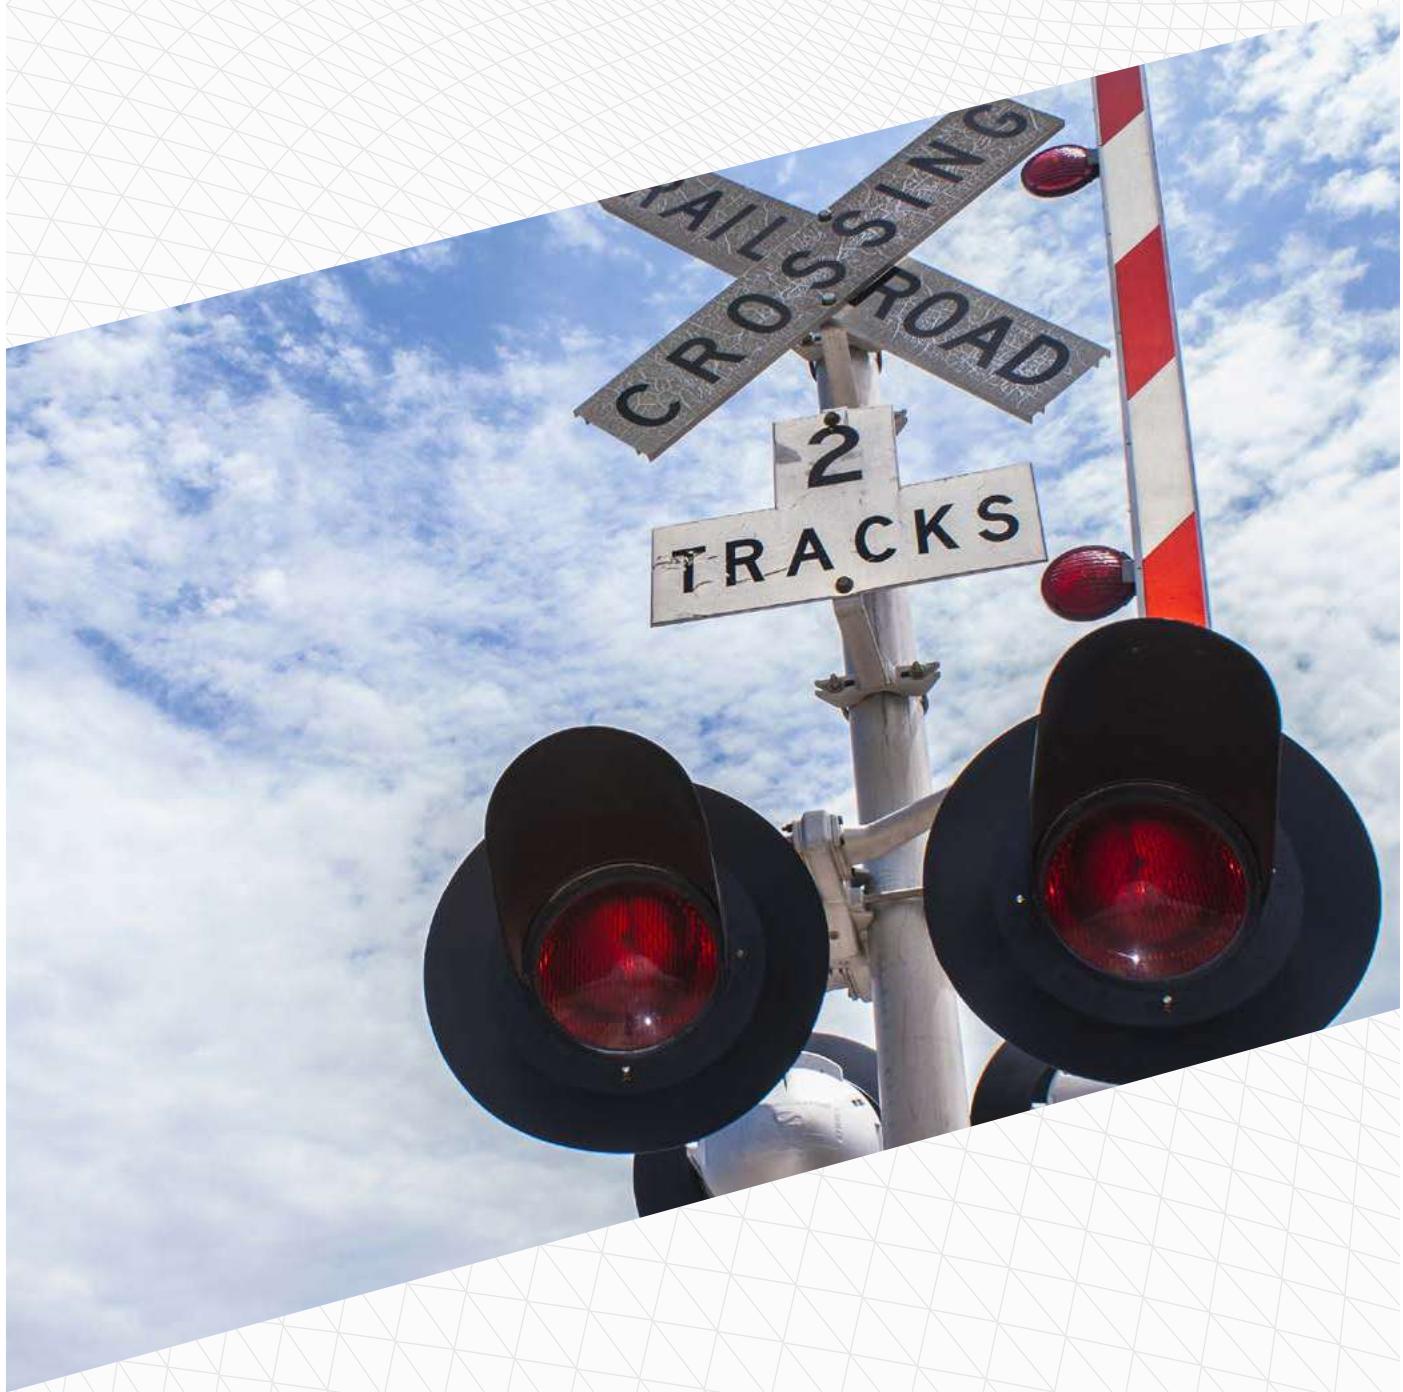

The images are for illustrative purposes only

TK-H5 SIGNAL MULTICONDUCTORS - REDUCTION FACTOR

ON REQUEST

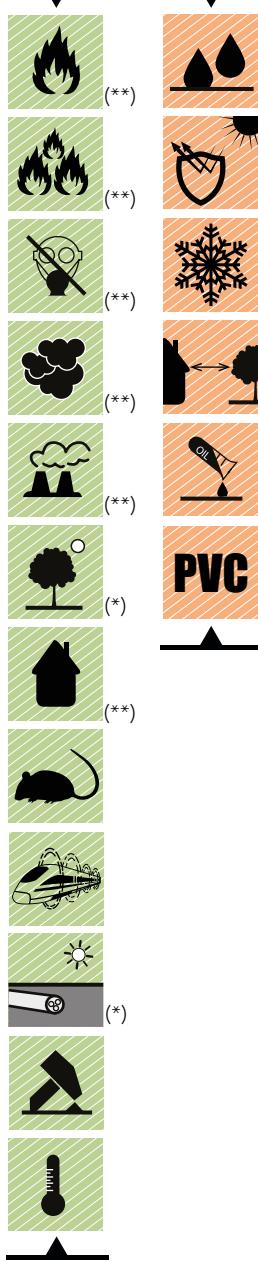

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Screen and moisture barrier Inner sheath

Armouring Outer sheath

Solid bare copper
Black numbered Polyethylene
N° conductors assembled together
with eventual filler and tape

Aluminium/PE/tape thermowelded to
inner sheath

Flame retardant, low smoke and
halogen-free or Polyethylene

Two steel tapes helically applied
Green flame retardant, low smoke and
halogen-free or black Polyethylene

TECHNICAL DATA

Operating temperature Minimum bending radius

- 40 °C ÷ + 70 °C
20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2
IEC 60332-3-24

Smoke density Halogen-free

IEC 61034-1/2
IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage 3500 V DC x 1 minute

Mutual capacitance @ 800 Hz ≤ 65 pF/m

**Reduction factor @ 50 Hz
@ 50-250 V/km** ≤ 0.3

ON REQUEST

Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version

(*) Only for PE version

(**) Only for LSZH version

TK-H5 SIGNAL MULTICONDUCTORS - REDUCTION FACTOR


MAIN FEATURES

Formation (n° of conductors)	Conductor diameter Ø (mm)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (GΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight PE (kg/km)	Nominal weight LSZH (kg/km)
4	1.4	≤12.1	≥ 10	1.8	16.7	390	450
8	1.4	≤12.1	≥ 10	1.8	19.0	560	620
12	1.4	≤12.1	≥ 10	1.8	22.0	700	780
20	1.4	≤12.1	≥ 10	1.8	26.0	900	1000
28	1.4	≤12.1	≥ 10	1.8	30.0	1160	1300
4	1.8	≤ 7.41	≥ 10	1.8	15.6	480	530
8	1.8	≤ 7.41	≥ 10	1.8	18.0	670	740
12	1.8	≤ 7.41	≥ 10	1.8	20.0	850	930
20	1.8	≤ 7.41	≥ 10	1.8	23.5	1200	1330
28	1.8	≤ 7.41	≥ 10	1.8	26.5	1430	1600



TK-H5 SIGNAL MULTIQUADS

ON REQUEST

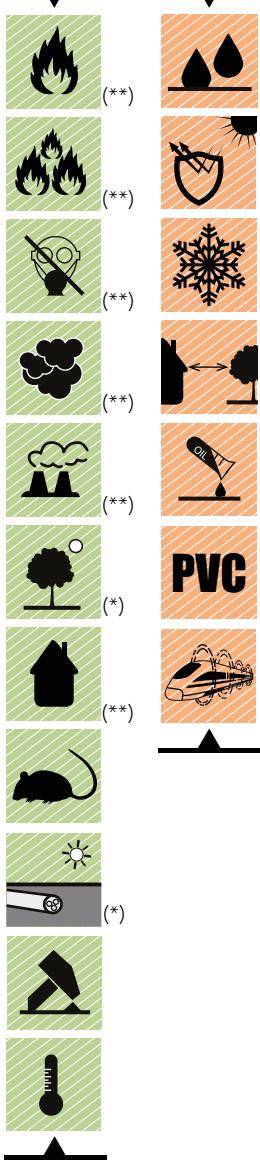

CABLE SPECIFICATIONS

Conductor Insulation **Quad**

Solid bare copper
Black numbered Polyethylene
4 conductors assembled together to form a star quad

Total assembling

N° star quads assembled together with eventual filler and tape

Screen and moisture barrier **Inner sheath**

Aluminium/PE/tape thermowelded to inner sheath

Armouring **Outer sheath**

Flame retardant, low smoke and halogen-free or Polyethylene
Two steel tapes helically applied
Green flame retardant, low smoke and halogen-free or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2
IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

3500 V DC x 1 minute

Mutual capacitance @ 800 Hz

≤ 45 pF/m

ON REQUEST

Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version
Reduction factor


(*) Only for PE version

(**) Only for LSZH version

TK-H5 SIGNAL MULTIQUADS


MAIN FEATURES

Formation (n° of quads)	Conductor diameter Ø (mm)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (GΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight PE (kg/km)	Nominal weight LSZH (kg/km)
1	0.9	≤28.4	≥ 10	1.5	12	190	220
3	0.9	≤28.4	≥ 10	1.5	17	360	400
5	0.9	≤28.4	≥ 10	1.5	19	470	530
7	0.9	≤28.4	≥ 10	1.5	21	570	640
10	0.9	≤28.4	≥ 10	1.8	24	750	850
14	0.9	≤28.4	≥ 10	1.8	27	950	1060
1	1.4	≤12.1	≥ 10	1.8	15	370	400
3	1.4	≤12.1	≥ 10	1.8	21	570	630
5	1.4	≤12.1	≥ 10	1.8	24	830	930
7	1.4	≤12.1	≥ 10	1.8	26	1020	1150
10	1.4	≤12.1	≥ 10	1.8	33	1320	1500
14	1.4	≤12.1	≥ 10	2.0	37	1550	1750

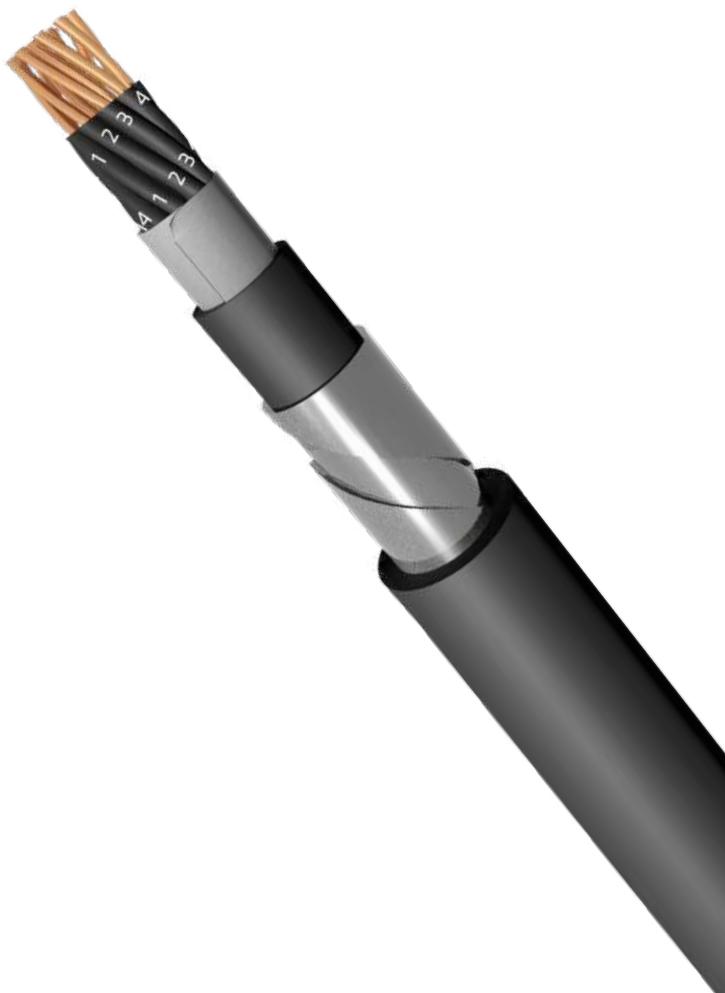

TK-H7 SIGNAL MULTICONDUCTORS - REDUCTION FACTOR

ON REQUEST

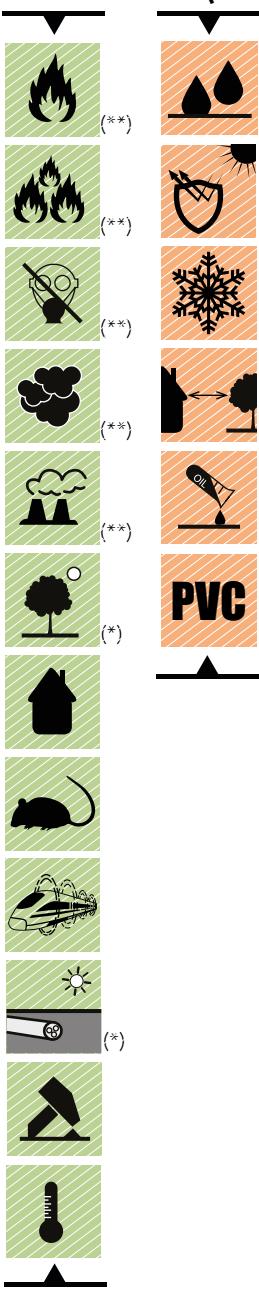

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Screen Inner sheath

Armouring Outer sheath

Solid bare copper, 0.9mm/1.4mm
Black numbered Polyethylene
N° conductors assembled with
eventual filler and tape

Corrugated copper tape
Flame retardant, low smoke and
halogen-free or Polyethylene

Two steel tapes helically applied
Green flame retardant, low smoke and
halogen-free or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

3500 V DC x 1 minute

Mutual capacitance @ 800 Hz

≤ 45 pF/m

Max attenuation @ 1 KHz

≤ 0.7 dB/km (0.9 mm)

≤ 1.6 dB/km (0.9 mm)

≤ 0.46 dB/km (1.4 mm)

≤ 0.85 dB/km (1.4 mm)

Reduction factor @ 50 Hz

≤ 0.3

@ 50-250 V/km

ON REQUEST

Filling compound

UV resistant

Arctic cables

Indoor/Outdoor

Oil resistant

PVC version


(*) Only for PE version

(**) Only for LSZH version


TK-H7 SIGNAL MULTICONDUCTORS - REDUCTION FACTOR

MAIN FEATURES

Formation (n° of conductors)	Conductor diameter Ø (mm)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (GΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight	
						PE (kg/km)	LSZH (kg/km)
4	0.9	≤28.4	≥ 10	1.8	16.5	450	520
12	0.9	≤28.4	≥ 10	1.8	21.0	690	800
20	0.9	≤28.4	≥ 10	2.0	24.0	900	1020
28	0.9	≤28.4	≥ 10	2.0	27.0	1080	1500
48	0.9	≤28.4	≥ 10	2.0	31.0	1420	1700
56	0.9	≤28.4	≥ 10	2.0	33.0	1560	1900
4	1.4	≤ 12.1	≥ 10	1.8	18.0	550	630
12	1.4	≤ 12.1	≥ 10	1.8	23.5	900	1020
20	1.4	≤ 12.1	≥ 10	2.0	27.5	1220	1380
28	1.4	≤ 12.1	≥ 10	2.0	31.5	1550	1730
48	1.4	≤ 12.1	≥ 10	2.0	37.0	2080	2350
56	1.4	≤ 12.1	≥ 10	2.0	39.5	2350	2670

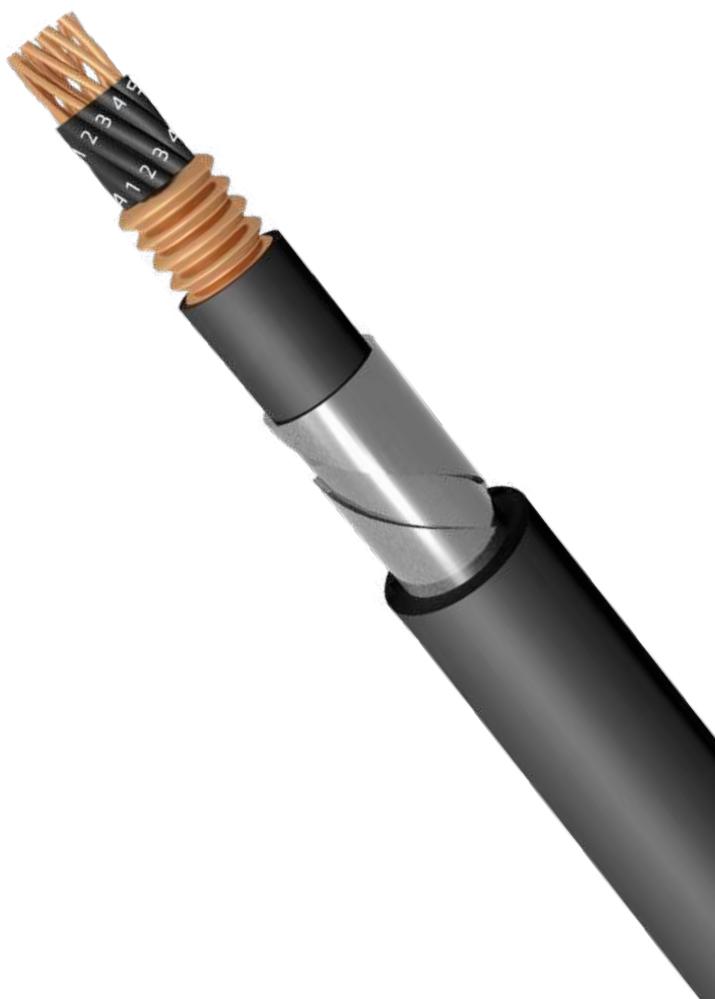

►TK-H7 SIGNAL MULTIPAIRS - REDUCTION FACTOR

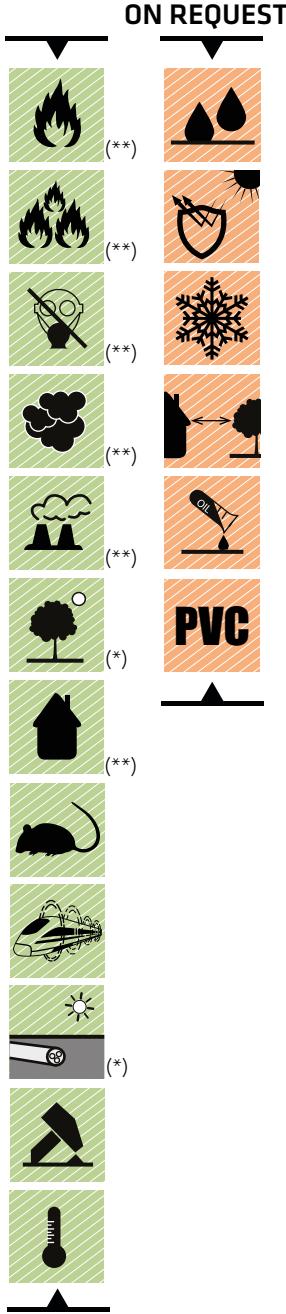

(*) Only for PE version

(**) Only for LSZH version

CABLE SPECIFICATIONS

Conductor	Solid bare copper
Insulation	Coloured Polyethylene
Pair	2 conductors assembled together to form a pair
assembling	N° pairs assembled with eventual filler and tape
inner sheath	Flame retardant, low smoke and halogen-free or Polyethylene
Screen	Corrugated copper tape
mediate sheath	Flame retardant, low smoke and halogen-free or Polyethylene
Armouring	Two steel tapes helically applied
outer sheath	Green flame retardant, low smoke and halogen-free or black Polyethylene

TECHNICAL DATA

Operating temperature - 40 °C ÷ + 70 °C
Minimum bending radius 20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2 IEC 60332-3-24
Smoke density	IEC 61034-1/2
Halogen-free	IEC 60754-1/2
Fumes	No corrosive and toxic fumes

MAIN FEATURES

Test voltage	2500 V DC x 1 minute
Mutual capacitance @ 800 Hz	$\leq 55 \text{ pF/m}$
Capacitance unbalance	$\leq 650 \text{ pF}/500\text{m}$
Max attenuation @ 45 KHz	$\leq 2.5 \text{ dB/km}$
Characteristic impedance @ 45 KHz	120 Ω
Reduction factor @ 50 Hz @ 100-320 V/km	≤ 0.3


ON REQUEST

- Filling compound
- UV resistant
- Arctic cables
- Indoor/Outdoor
- Oil resistant
- PVC version

TK-H7 SIGNAL MULTIPAIRS - REDUCTION FACTOR


MAIN FEATURES

Formation (n° of pairs)	Conductor nominal section (mm ²)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (GΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight PE (kg/km)	Nominal weight LSZH (kg/km)
2	1	≤ 18.1	≥ 10	1.8	19.2	600	670
3	1	≤ 18.1	≥ 10	1.8	19.8	650	730
4	1	≤ 18.1	≥ 10	1.8	20.8	720	820
7	1	≤ 18.1	≥ 10	1.8	24.5	950	1070
14	1	≤ 18.1	≥ 10	2.0	31.2	1400	1550
21	1	≤ 18.1	≥ 10	2.2	36.2	1700	1930
28	1	≤ 18.1	≥ 10	2.2	41.0	2150	2410
4	1.5	≤ 12.1	≥ 10	1.8	22.1	800	860
7	1.5	≤ 12.1	≥ 10	1.8	25.0	930	1100
14	1.5	≤ 12.1	≥ 10	2.0	32.5	1500	1670
21	1.5	≤ 12.1	≥ 10	2.2	37.5	1800	2000
28	1.5	≤ 12.1	≥ 10	2.2	43.0	2220	2500

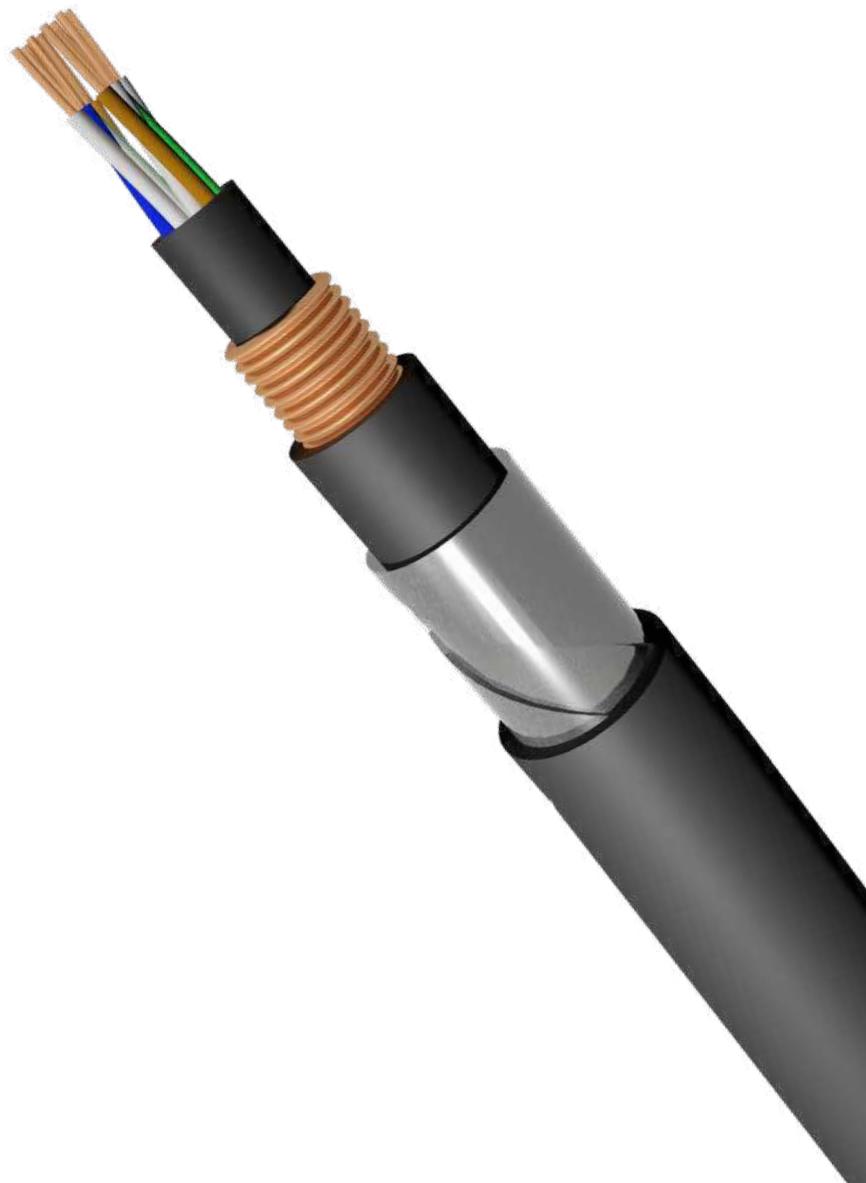

TK-CW SIGNAL MULTIQUADS - REDUCTION FACTOR

ON REQUEST

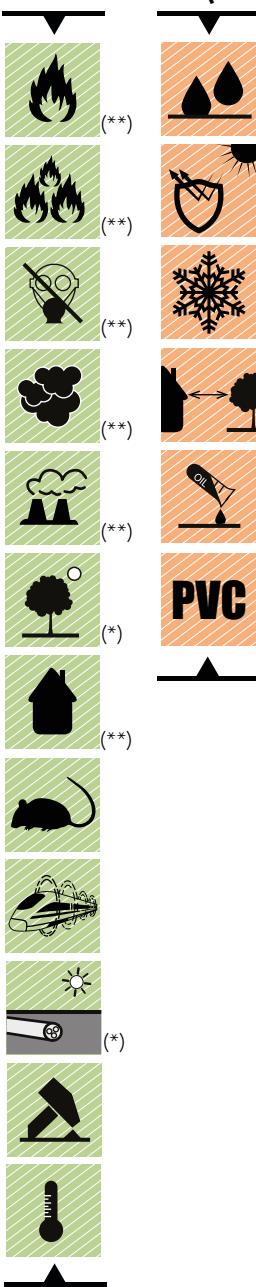

CABLE SPECIFICATIONS

Conductor Insulation Quad

Total assembling

Screen and moisture barrier Inner sheath

Concentric screen Armouring Outer sheath

Solid bare copper

Coloured Polyethylene

4 conductors assembled together to form a star quad

N° star quads assembled together with eventual filler and tape

Aluminium/PE/tape thermowelded to inner sheath

Flame retardant, low smoke and halogen-free or Polyethylene

One solid copper layer

Two steel tapes helically applied

Green flame retardant, low smoke and halogen-free or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

2500 V AC x 1 minute

Mutual capacitance @ 800 Hz

≤ 45 pF/m

Capacitance unbalance

≤ 650 pF/500m

Max attenuation @ 90 KHz

≤ 3.3 dB/km (0.9 mm)
≤ 2.6 dB/km (1.4 mm)

Reduction factor @ 50 Hz

≤ 0.3

@ 50-250 V/km

ON REQUEST

Filling compound
UV resistant
Arctic cables
Indoor/Outdoor
Oil resistant
PVC version


(*) Only for PE version

(**) Only for LSZH version

TK-CW SIGNAL MULTIQUADS - REDUCTION FACTOR

MAIN FEATURES

Formation (n° of quads)	Conductor diameter Ø (mm)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (GΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight PE (kg/km)	Nominal weight LSZH (kg/km)
3	0.9	≤ 28.4	≥ 10	1.8	21.0	800	850
5	0.9	≤ 28.4	≥ 10	1.8	23.0	1010	1080
10	0.9	≤ 28.4	≥ 10	2.0	28.0	1430	1500
20	0.9	≤ 28.4	≥ 10	2.2	35.0	2130	2210
30	0.9	≤ 28.4	≥ 10	2.2	40.0	2800	2940
40	0.9	≤ 28.4	≥ 10	2.5	45.0	3380	3510
3	1.4	≤ 12.1	≥ 10	2.0	25.0	1350	1410
5	1.4	≤ 12.1	≥ 10	2.0	29.0	1760	1820
10	1.4	≤ 12.1	≥ 10	2.2	37.0	2620	2730
20	1.4	≤ 12.1	≥ 10	2.6	47.0	4040	4200
30	1.4	≤ 12.1	≥ 10	3.0	54.0	5330	5610
40	1.4	≤ 12.1	≥ 10	3.0	61.0	6550	6900

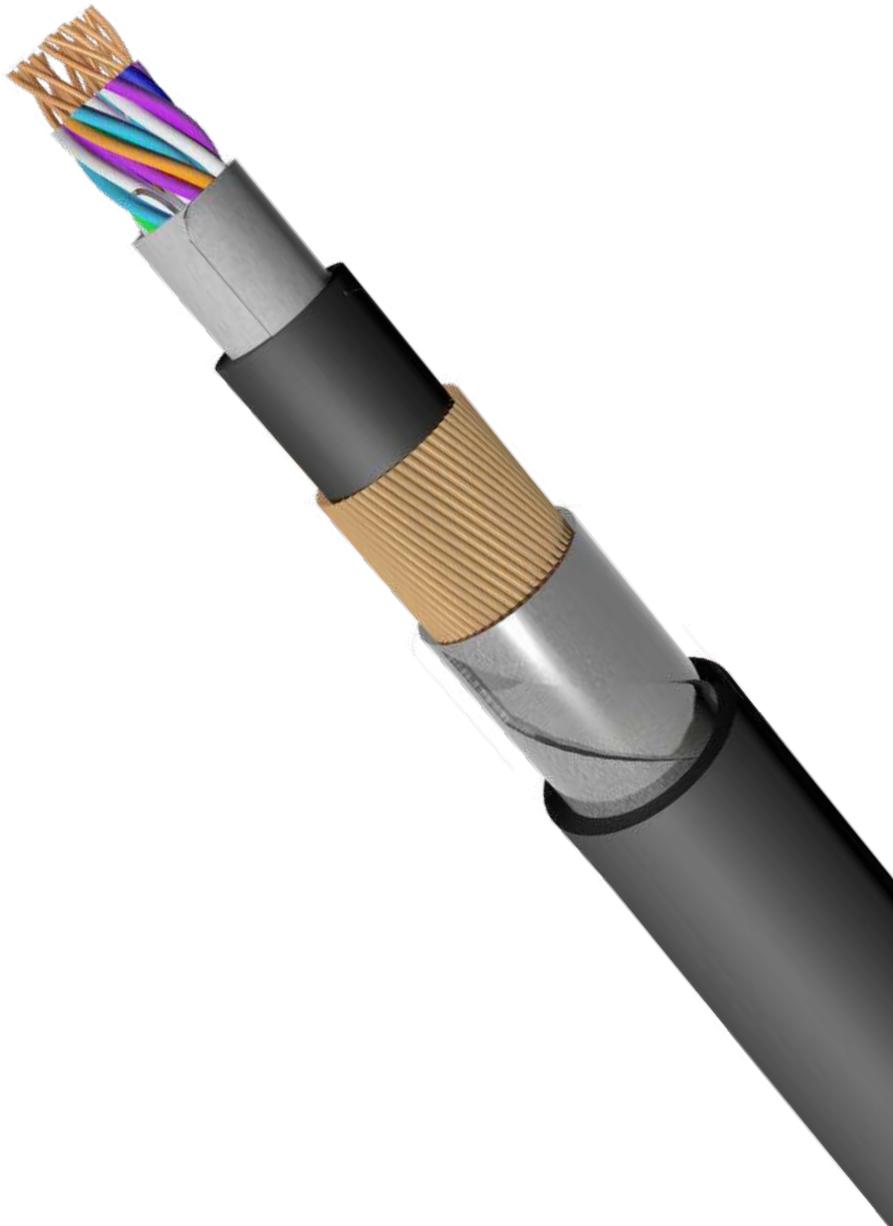

TK-UNARMOURED 409 SIGNAL

ON REQUEST



CABLE SPECIFICATIONS

Conductor

Solid tinned copper, section from 1 to 6 mm²
Stranded copper, section from 10 to 25 mm²
Extra-flexible copper, section 1.5 mm²

Insulation

Coloured type crosslinked LSZH compound

Assembling

N° conductors assembled with eventual filler and tape

Inner sheath

Type crosslinked LSZH

Outer sheath

Black crosslinked flame retardant, low smoke and halogen-free compound

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Filling compound
UV resistant
Arctic cables
PVC version

MAIN FEATURES


Formation	Conductor nominal section	Resistance of conductor @20 °C	Insulation resistance @20 °C	Outer sheath nominal thickness	Outer sheath nominal Ø	Nominal weight LSZH
(n° of conductors)	(mm ²)	(Ω/km)	(MΩxkm)	(mm)	(mm)	(kg/km)
4	1	≤18.2	≥ 300	1.4	11.6	110
8	1	≤18.2	≥ 300	1.6	15.0	190
16	1	≤18.2	≥ 300	2.0	19.5	350
2	2.5	≤7.56	≥ 250	1.6	13.0	150
4	2.5	≤7.56	≥ 250	1.6	14.5	200
2	4	≤4.70	≥ 200	1.6	13.8	190
3	4	≤4.70	≥ 200	1.6	14.6	220
2	6	≤3.11	≥ 200	1.6	15.0	260
3	6	≤3.11	≥ 200	1.6	15.5	280
3	10	≤1.84	≥ 150	2.0	19.0	460
3	16	≤1.16	≥ 150	2.0	21.5	630
3	25	≤0.734	≥ 150	2.0	24.5	900
4	1.5	≤13.70	≥ 300	1.4	12.6	130
8	1.5	≤13.70	≥ 300	1.8	16.8	240
16	1.5	≤13.70	≥ 300	2.5	23.0	470

CPR

B2ca - s1a, d1, a1

TK-ARMoured 409 SIGNAL

ON REQUEST

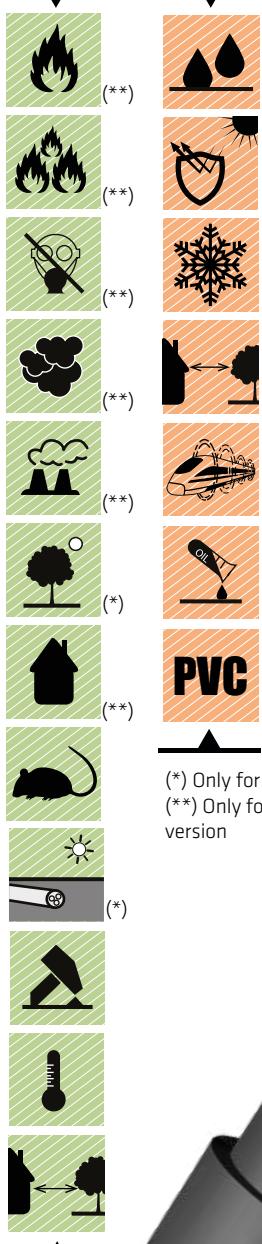

CABLE SPECIFICATIONS

Conductor

Solid tinned copper, section from 1 to 6 mm²
Stranded copper, section from 10 to 25 mm²
Extra-flexible copper, section 1.5 mm²

Insulation

Coloured type crosslinked LSZH compound

Assembling

N° conductors assembled with eventual filler and tape

Inner sheath

Type crosslinked LSZH compound

Intermediate sheath

Type crosslinked LSZH compound

Armouring

Two steel tapes helically applied

Outer sheath

Black flame retardant, low smoke and halogen-free compound or black polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Filling compound

UV resistant

Arctic cables

Reduction factor

Oil resistant

PVC version

MAIN FEATURES


Formation (n° of conductors)	Conductor diameter Ø (mm)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (MΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight LSZH (kg/km)	PE (kg/km)	LSZH (kg/km)
4	1	≤ 18.2	≥ 300	0.8	16.0	280	320	
8	1	≤ 18.2	≥ 300	0.8	19.5	420	480	
16	1	≤ 18.2	≥ 300	0.8	24.0	620	680	
2	2.5	≤ 7.56	≥ 250	0.8	17.0	360	395	
4	2.5	≤ 7.56	≥ 250	0.8	19.0	410	460	
2	4	≤ 4.70	≥ 200	0.8	18.5	395	440	
3	4	≤ 4.70	≥ 200	0.8	19.0	430	480	
2	6	≤ 3.11	≥ 200	0.8	19.5	460	510	
3	6	≤ 3.11	≥ 200	0.8	20.0	500	560	
3	10	≤ 1.84	≥ 150	0.8	23.5	700	780	
3	16	≤ 1.16	≥ 150	0.8	26.0	940	1020	
3	25	≤ 0.73	≥ 150	0.8	29.5	1240	1350	
4	1.5	≤ 13.7	≥ 300	0.8	17.0	320	360	
8	1.5	≤ 13.7	≥ 300	0.8	21.0	490	540	
16	1.5	≤ 13.7	≥ 300	0.8	27.0	800	880	

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

>TK-DIELECTRIC ARMOURED 409 SIGNAL

ON REQUEST

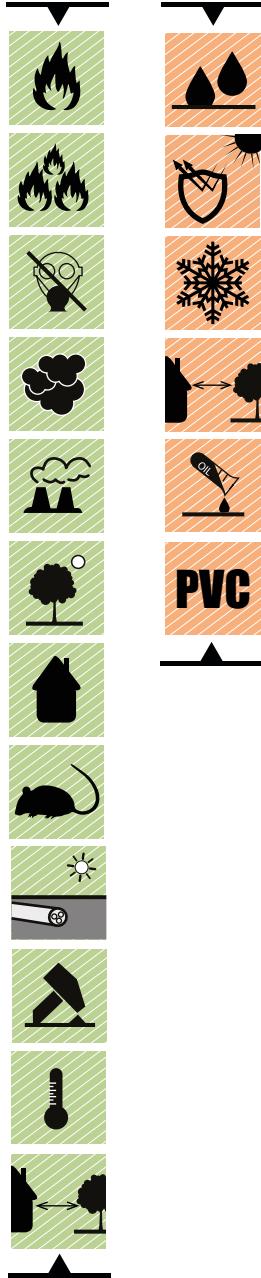

CABLE SPECIFICATIONS

Conductor

Solid tinned copper, section from 1 to 6 mm²
Stranded copper, section from 10 to 25 mm²
Extra-flexible copper, section 1.5 mm²

Insulation

Coloured type crosslinked LSZH compound

Assembling

N° conductors assembled with eventual filler and tape

Inner sheath

Type crosslinked LSZH compound

Intermediate sheath

Type crosslinked LSZH compound

Armouring

Double layer of glass yarns + glass tape

Outer sheath

Black flame retardant, low smoke and halogen-free compound or black crosslinked LSZH

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Filling compound

UV resistant

Arctic cables

Oil resistant

PVC version


CPR

B2ca - s1a, d1, a1

TK-DIELECTRIC ARMOURED 409 SIGNAL

MAIN FEATURES

Formation (n° of conductors)	Nominal section conductor Ø (mm ²)	Resistance of conductor @20 °C (Ω/km)	Insulation resistance @20 °C (MΩxkm)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight LSZH (kg/km)
4	1	≤ 18.2	≥ 250	1.8	16.0	275
8	1	≤ 18.2	≥ 250	1.8	19.5	405
16	1	≤ 18.2	≥ 250	1.8	24.0	600
2	2.5	≤ 7.56	≥ 250	1.8	17.0	310
4	2.5	≤ 7.56	≥ 250	1.8	19.0	380
2	4	≤ 4.70	≥ 250	1.8	18.5	370
3	4	≤ 4.70	≥ 250	1.8	19.0	400
2	6	≤ 3.11	≥ 250	1.8	19.5	120
3	6	≤ 3.11	≥ 250	1.8	20.0	480
3	10	≤ 1.84	≥ 250	1.8	23.5	640
3	16	≤ 1.16	≥ 250	2.0	26.0	920
3	25	≤ 0.73	≥ 250	2.0	29.5	1280
4	1.5	≤ 13.7	≥ 250	1.8	17.0	320
8	1.5	≤ 13.7	≥ 250	1.8	21.0	470
16	1.5	≤ 13.7	≥ 250	2.0	27.0	800

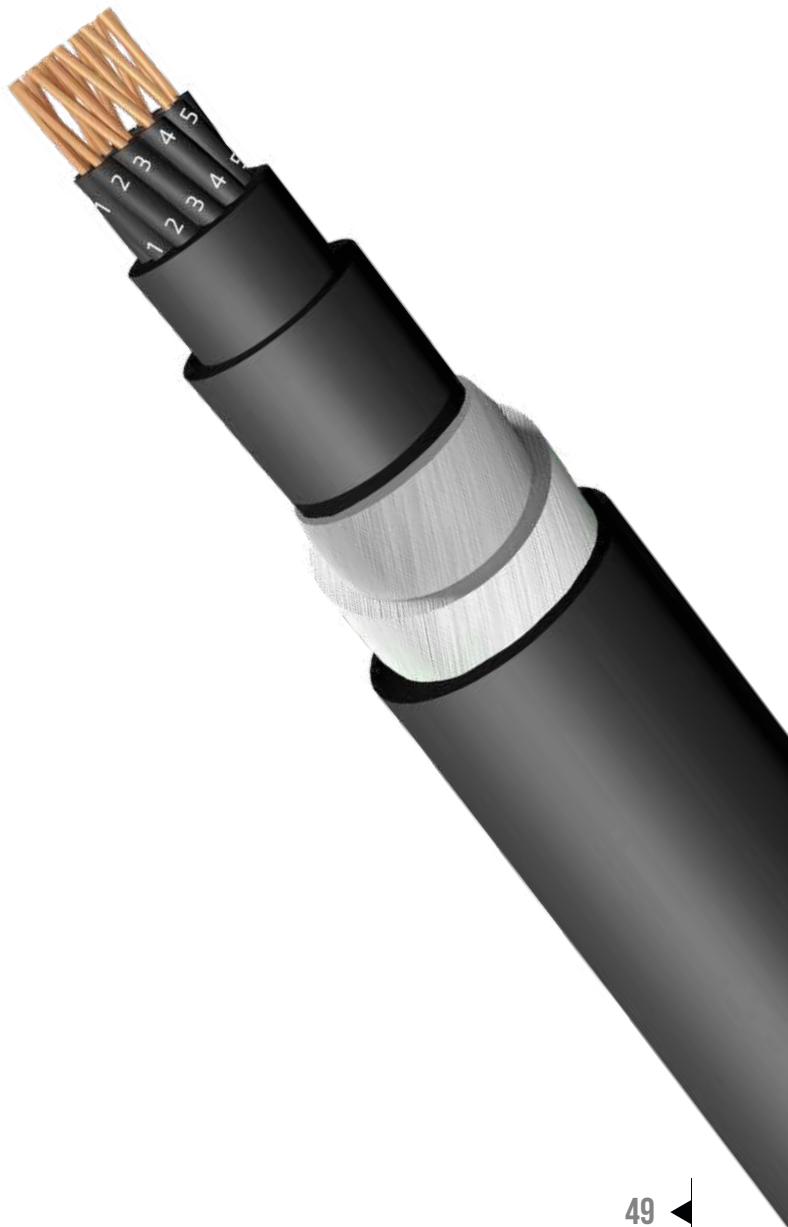


ON REQUEST		CABLE SPECIFICATIONS			
		Conductor Stranded bare copper Insulation Coloured type crosslinked LSZH compound			
		Assembling Single core or N° conductors assembled with eventual filler and tape			
		Outer sheath Black flame retardant, low smoke and halogen-free compound or black crosslinked LSZH			
TECHNICAL DATA		Operating temperature - 40 °C ÷ + 70 °C Minimum bending radius 5xØ			
FIRE PERFORMANCE		Fire propagation IEC 60332-1-2 IEC 60332-3-24 Smoke density IEC 61034-1/2 Halogen-free IEC 60754-1/2 Fumes No corrosive and toxic fumes			
ON REQUEST		UV resistant Arctic cables Oil resistant PVC version			
MAIN FEATURES					
Formation (n° of conductors)	Conductor nominal section (mm²)	Resistance of conductor @20 °C (Ω/km)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight (kg/km)
1	0.5	39		2.6	11
1	1	19.5		2.9	17
1	1.5	13.3		3.2	22
1	2.5	7.98		3.8	35
1	4	4.95		4.5	53
1	6	3.30		4.8	70
5	0.5	39	1.2	9.2	120
12	0.5	39	1.2	12.8	230
20	0.5	39	1.2	15.7	350
20	1	19.5	1.2	17.8	515



Cca - s1b, d1, a1

TK-412 SIGNAL

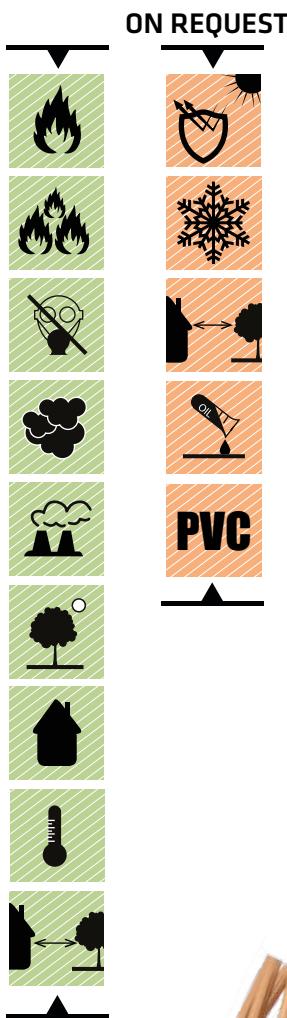

CABLE SPECIFICATIONS

Conductor Insulation

Stranded bare copper
Coloured type crosslinked LSZH compound

Assembling

Single core or N° conductors assembled with eventual filler and tape

Outer sheath

Black flame retardant, low smoke and halogen-free compound or black crosslinked LSZH

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

5xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2
IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

UV resistant
Arctic cables
Oil resistant
PVC version

MAIN FEATURES


Formation (n° of conductors)	Conductor nominal section (mm ²)	Resistance of conductor @20 °C (Ω/km)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight (kg/km)
1	0.6	32		2.25	10
1	0.93	20.5		2.45	15
1	2.5	7.98		3.75	35
1	4	4.95		4.2	50
20+1	0.6	32	1.1	13.8	290
6+1	0.93	20.5	1.0	9.3	170
12+1	0.93	20.5	1.1	12.9	290
20+1	0.93	20.5	1.2	15.4	400
3	2.5	7.98	1.0	9.7	190
10	2.5	7.98	1.2	16.8	440
10	4	4.95	1.3	18.8	680

CPR

Cca - s1b, d1, a1

TK-POINT MACHINE

ON REQUEST

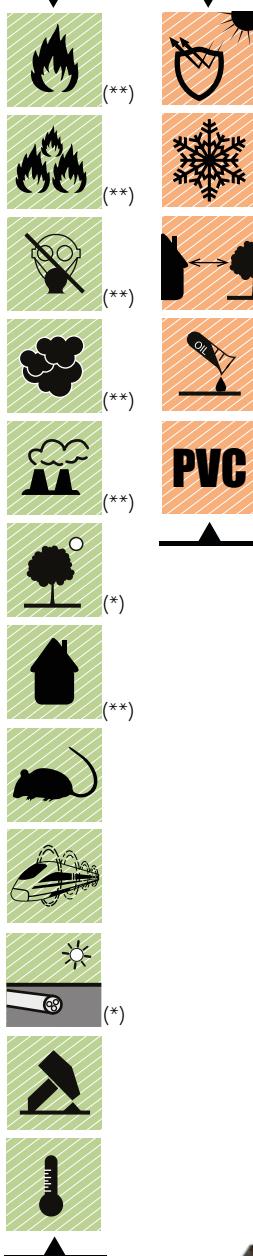

CABLE SPECIFICATIONS

Conductor Insulation Assembling

Solid bare copper
Black numbered Polyethylene
5 conductors assembled with eventual
filler and tape

Screen Inner sheath

Corrugated copper tape
Flame retardant, low smoke and
halogen-free or Polyethylene

Armouring Outer sheath

Two steel tapes helically applied
Green flame retardant, low smoke and
halogen-free or black Polyethylene

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

20xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2
IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

3500 V AC x 5 minute

Mutual capacitance @800 Hz

≤ 50 pF/m

Max attenuation @ 1 KHz

≤ 0.44 dB/km (2.5 mm²)

@ 10 KHz

≤ 0.81 dB/km (2.5 mm²)

@ 1 KHz

≤ 0.41 dB/km (4 mm²)

@ 10 KHz

≤ 0.78 dB/km (4 mm²)

@ 1 KHz

≤ 0.41 dB/km (6 mm²)

@ 10 KHz

≤ 0.78 dB/km (6 mm²)

Reduction factor @ 50 Hz

≤ 0.3

@100-350 v/km

ON REQUEST

Arctic cables
Indoor/Outdoor
Reduction factor
Oil resistant
PVC version

MAIN FEATURES

Formation	Conductor nominal section	Resistance of conductor @20°C	Insulation resistance @20°C	Outer sheath nominal thickness	Outer sheath nominal Ø	Nominal weight PE	Nominal weight LSH
(n° of conductors)	(mm ²)	(Ω/km)	(GΩ/km)	(mm)	(mm)	(kg/km)	
5	2.5	≤ 7.41	≥10	1.8	20.0	720	820
5	4	≤ 4.61	≥10	1.8	22.5	880	1000
5	6	≤ 3.08	≥10	1.8	24.0	1000	1120


>POWER AND CONTROL CABLES



The images are for illustrative purposes only

TK-CONTROL FOR AUTOMATIC BLOCK

ON REQUEST

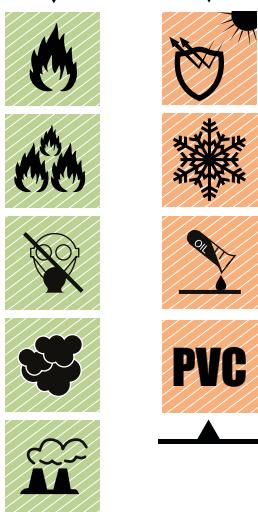

CABLE SPECIFICATIONS

Conductor Insulation

Extra flex 1.5mm² stranded tinned copper
Coloured type crosslinked LSZH
compound

Pair Individual pairs screen

Two conductors assembled to form a pair
Aluminium/Polyester tape

Total Assembling

N° pairs assembled together with
eventual filler and tape

Overall screen Inner sheath

Tinned copper braid
Coloured type crosslinked LSZH
compound

Outer sheath

Black flame retardant, low smoke
and halogen-free compound or black
crosslinked LSZH

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 80 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2
IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

MAIN FEATURES

Test voltage

3000 V AC x 10 minute

Resistance of conductor

≤ 28.4 Ω

Mutual capacitance @ 800 Hz

≤ 120 pF/m

ON REQUEST

UV resistant
Arctic cables
Oil resistant
PVC version

MAIN FEATURES

Formation

Outer sheath nominal Ø

Nominal weight

(n° of pairs)

(mm)

(kg/km)

2

18.0

430

4

21.5

580

8

30.0


1050

CPR

B2ca - s1a, d1, a1

TK-POWER FOR AUTOMATIC BLOCK

ON REQUEST

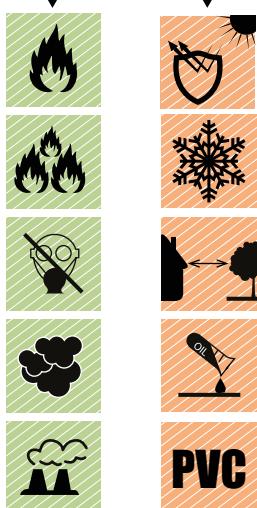

CABLE SPECIFICATIONS

Conductor Insulation

Stranded tinned copper, 10 mm²
Coloured Ptype crosslinked LSZH compound

Assembling

2 conductors assembled together to form a star quad with eventual filler and tape

Screen

Tinned copper braid

Inner sheath

Type crosslinked LSZH compound

Outer sheath

Black flame retardant, low smoke and halogen-free compound or black crosslinked LSZH

Outer diameter

18.5 mm

TECHNICAL DATA

Operating temperature

- 30 °C ÷ + 80 °C

Minimum bending radius

15xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2

Smoke density

IEC 60332-3-24

Halogen-free

IEC 61034-1/2

Fumes

IEC 60754-1/2

No corrosive and toxic fumes

MAIN FEATURES

Resistance of conductor @ 20 °C ≤ 1.84 Ω/km

Insulation resistance @ 20 °C ≥ 155 Ω x km

Test voltage

3000 V AC x 10 minute

Mutual capacitance @ 800 Hz ≤ 150 pF/m

Nominal weight

500 kg/km

ON REQUEST


UV resistant
Arctic cables
Indoor/Outdoor
Oil Resistant
PVC version

CPR

B2ca - s1a, d1, a1

TK-ANTI-THEFT CABLE FOR POINTS HEATING

ON REQUEST

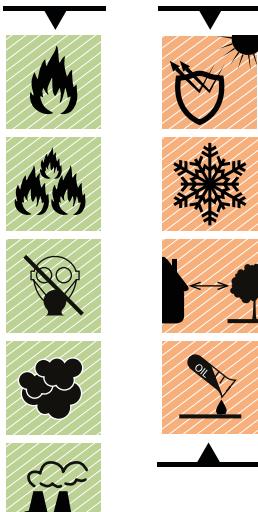

CABLE SPECIFICATIONS

Conductor

Stranded aluminium from 50 to 185mm²
Stranded steel from 25 to 110mm²
Stranded hybrid copper braid from 16 to 150mm²

Insulation

Coloured type crosslinked LSZH compound

Assembling

Single core

Outer sheath

PVC or Black flame retardant, low smoke and halogen-free compound or crosslinked LSZH

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

8xØ

FIRE PERFORMANCE

(*) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density (*)

IEC 61034-1/2

Halogen-free (*)

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

UV resistant

Arctic cables

Indoor/Outdoor

Oil resistant



CPR

B2ca,s1a,a1

TK-ANTI-THEFT CABLE FOR POINTS HEATING

MAIN FEATURES - ALUMINIUM

Formation (n° of pairs)	Section (mm²)	Resistance of conductor @20°C (Ω/km)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight	
					PVC	LSZH
1	50	≤0.673	1.5	14.5	260	
1	120	≤0.263	1.5	20.5	530	
1	185	≤0.173	1.8	25.3	790	


MAIN FEATURES - STEEL

Formation (n° of pairs)	Section (mm²)	Resistance of conductor @20°C (Ω/km)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight	
					PVC	LSZH
1	25	≤6.5	1.4	13.5		340
1	50	≤3	1.6	17.5		6560
1	110	≤1.5	1.8	21		1120

MAIN FEATURES - HYBRID

Formation (n° of pairs)	Section (mm²)	Resistance of conductor @20°C (Ω/km)	Outer sheath nominal thickness (mm)	Outer sheath nominal Ø (mm)	Nominal weight	
					PVC	LSZH
1	16	≤4.5	1.4	11.3	240	
1	35	≤0.95		15.2		490
1	50	≤0.65	1.6	17.5		700
1	120	≤0.37	1.6	22.5	1310	
1	120	≤0.37	1.6	22.5		1400
1	150	≤0.42	2	25		1600

ON REQUEST

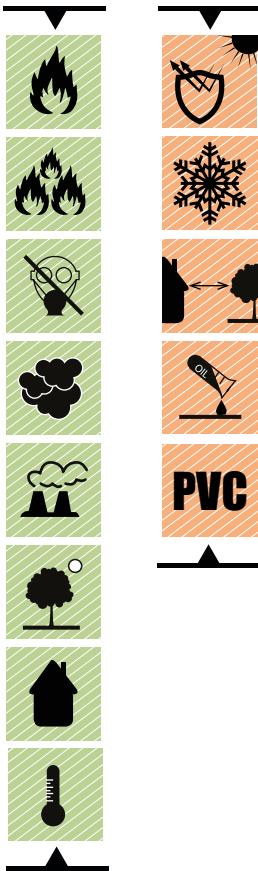

CABLE SPECIFICATIONS

Conductor

Stranded bare or tinned copper from 1 to 400 mm²

Insulation

Coloured or numbered type crosslinked LSZH compound

Assembling

Single core or N° conductors assembled with eventual filler and tape

Inner layer

LSZH compound

Screen (optional)

Tinned copper braid

Outer sheath

Black flame retardant, low smoke and halogen-free compound or black crosslinked LSZH

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

(*) Only for PE version

(**) Only for LSZH version

ON REQUEST

UV resistant

Arctic cables

Indoor/Outdoor

Oil resistant


PVC version

Fire Resistant



B2ca-s1a,d1,a1
Cca-s1b,d1,a1


> OPTICAL CABLES

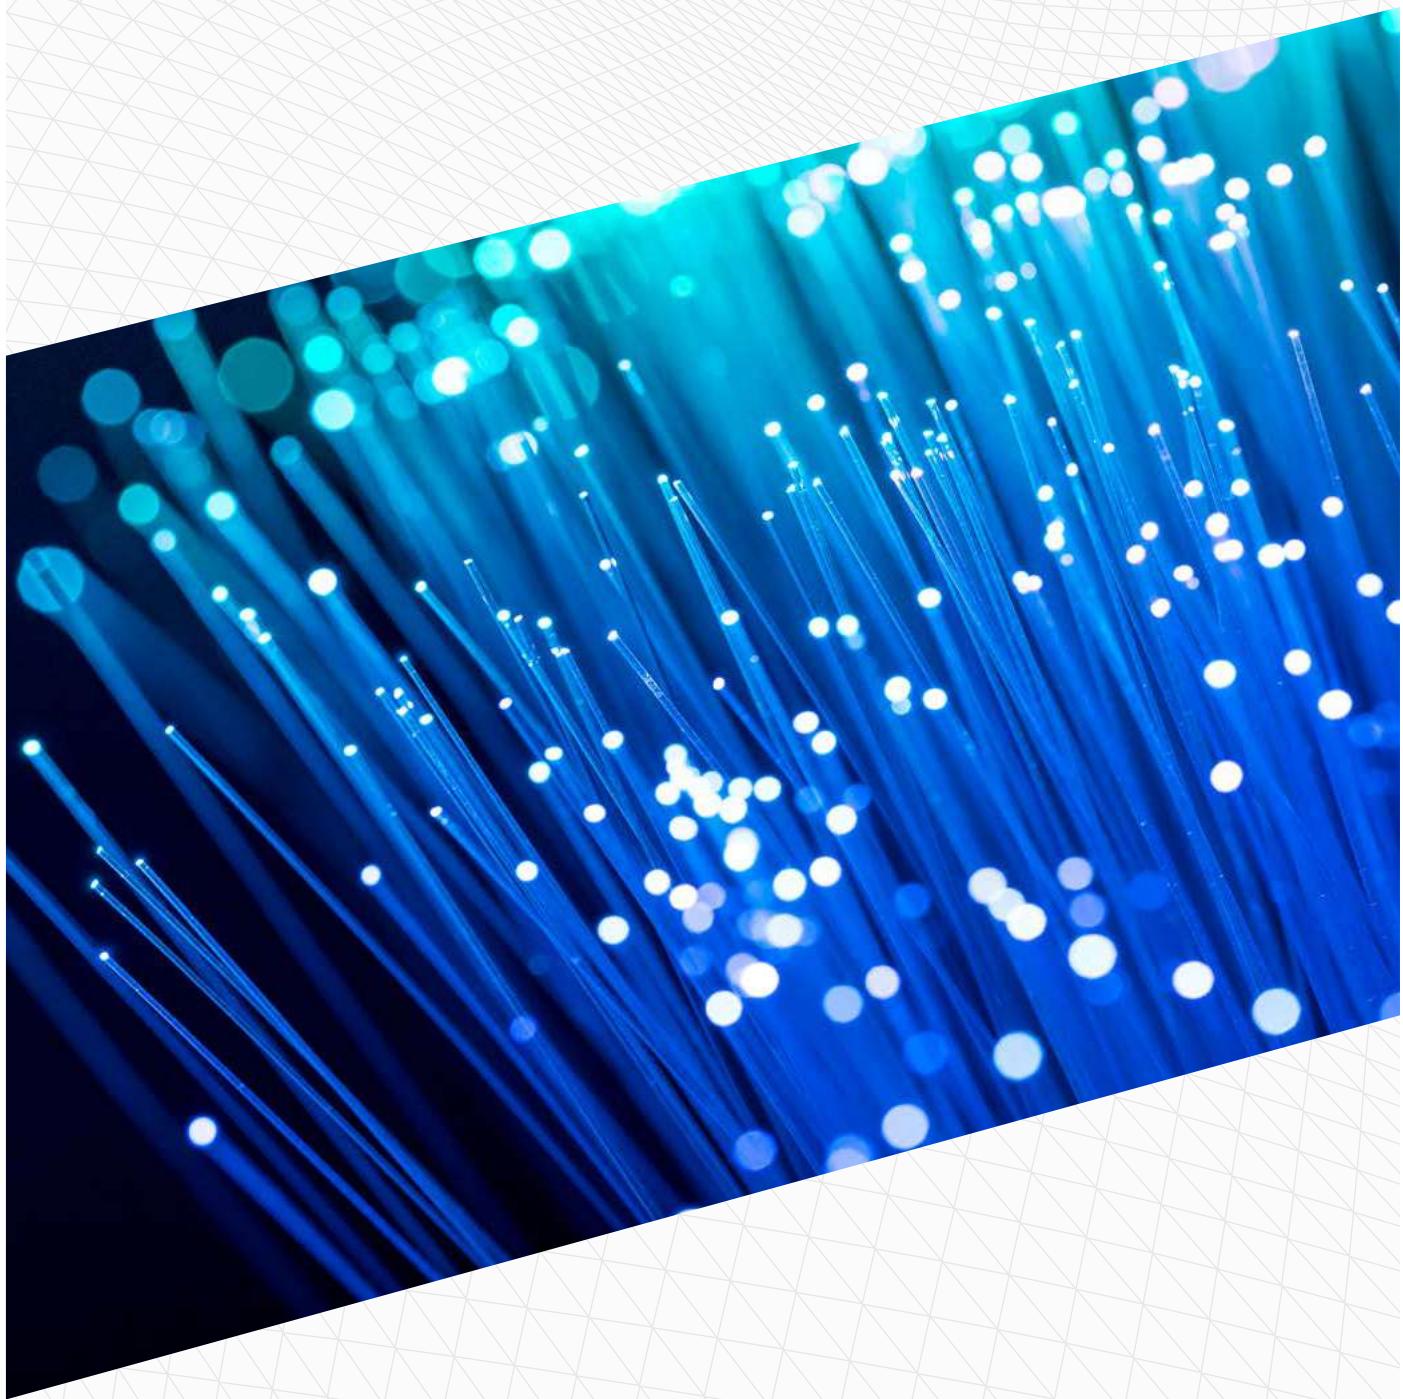

The images are for illustrative purposes only

TK-BCA FIBER OPTIC TRAIN DETECTION

ON REQUEST

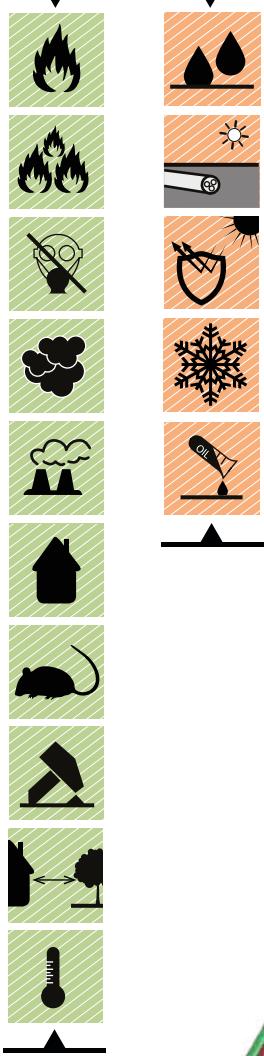

CABLE SPECIFICATIONS

Fiber structure

Tight buffer 900 µm
Semitight buffer 900 µm

Tight colour code

See table C

Assembling

4 ÷ 24 fibers

Protection

Aramidic yarns

Inner sheath

Flame retardant, low smoke and halogen-free

Armouring

Corrugated steel tape thermowelded to outer sheath

Outer sheath

Flame retardant, low smoke and halogen-free

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 80 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2

IEC 60332-3-22

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Water resistant

Polyethylene sheath for direct buried

UV resistant

Arctic cables

Oil resistance

MAIN FEATURES


No. of fiber	Nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
4	11.0	120	2000	2000	20
8	12.0	150	2000	2000	20
10	13.0	175	2500	2000	20
12	13.0	180	2500	2000	20
24	14.0	220	3000	2000	20

CPR

B2ca - s1a, d1, a1

TK-DIELECTRIC OPTICAL CABLE FOR SSE

ON REQUEST

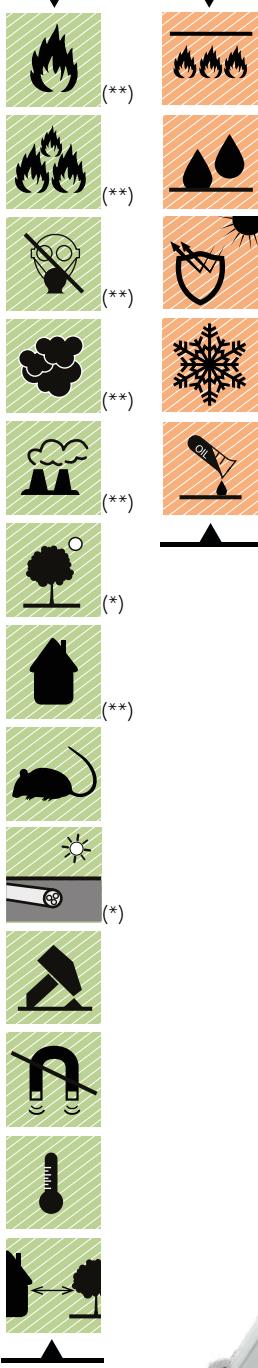

CABLE SPECIFICATIONS

Fiber structure	Jelly filled loose tube
Fiber colour code	See table A
Loose tube colour	Natural
Assembling	2 ÷ 12 fibers
Strain relief	Aramidic/Glass yarns
Inner sheath	Flame retardant, low smoke and halogen-free or Polyethylene
Armouring	Glass flat
Outer sheath	Flame retardant, low smoke and halogen-free or Polyethylene, Ø 13.5mm

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ
Nominal weight	230 kg/km

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2
IEC 60332-3-22

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Fire resistant
Water resistant
UV resistant
Arctic cables
Oil resistance

(*) Only for PE version


(**) Only for LSZH version

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

TK-MTB BREAKOUT CABLES - LSZH

ON REQUEST

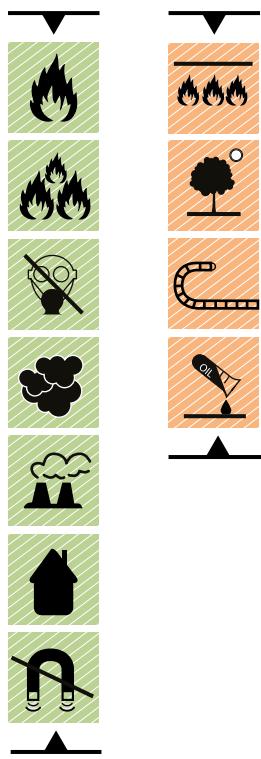

CABLE SPECIFICATIONS

Fiber structure

Tight buffer 900 µm
Semitight buffer 900 µm

Tight colour code

White

Strain relief

Aramidic yarns

Sub unit Sheath

Numbered flame retardant, low smoke and halogen-free material

Assembling

4 to 24 sub units

Outer Sheath

Flame retardant, low smoke and halogen-free material

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2
IEC 60332-3-24 Cat. C

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Fire resistant
UV resistant
Polyurethane sheath for dynamic application
Oil resistance


MAIN FEATURES

No. of fiber	Nominal diameter Ø	Nominal weight	Max pulling force	Max crush	Impact
	(mm)	(kg/km)	(N)	(N/dm)	(J)
4	6.8	45	500	1000	10
6	8.0	60	1000	1000	10
8	9.8	90	1500	1000	10
12	12.6	165	2000	1000	10
16	12.0	150	3000	1000	10
24	15.0	210	4000	1000	10



TK-MTBA ARMoured BREAKOUT CABLES - LSZH

ON REQUEST

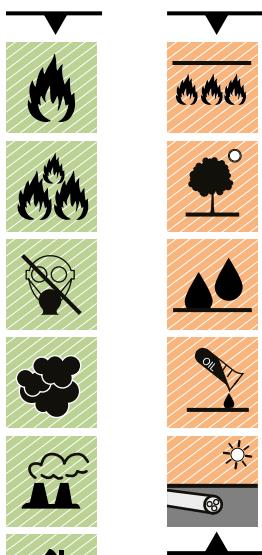

CABLE SPECIFICATIONS

Fiber structure

Tight buffer 900 µm
Semitight buffer 900 µm

Tight colour code

White
Aramidic yarns

Strain relief

Numbered flame retardant, low smoke and halogen-free material, Ø 2mm

Sub unit Sheath

4 to 24 sub units

Assembling

Flame retardant, low smoke and halogen-free material

Inner Sheath

Galvanized steel wire braid (GSWB)

Armouring

Flame retardant, low smoke and halogen-free material

Outer Sheath

Flame retardant, low smoke and halogen-free material

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

15xØ

FIRE PERFORMANCE

Fire propagation

IEC 60332-1-2
IEC 60332-3-24 Cat. C

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Fire resistant
UV resistant
Water resistant
Oil resistant
Polyethylene sheath for direct buried

MAIN FEATURES


No. of fiber	Nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
4	11.0	180	1000	2000	20
6	12.0	200	1500	2000	20
8	13.8	230	2000	2000	20
12	16.5	300	2500	2000	20
16	16.0	280	3500	2000	20
24	19.0	350	4500	2000	20

CPR

B2ca - s1a, d1, a1

TK-UT9X ARMoured UNITUBE

ON REQUEST

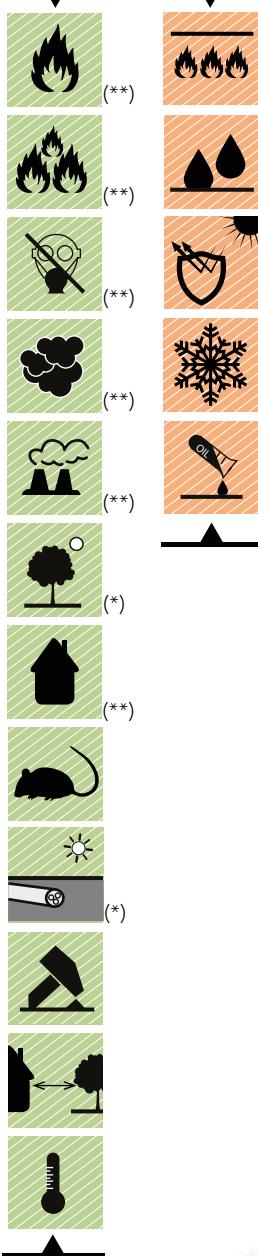

CABLE SPECIFICATIONS

Fiber structure	Jelly filled loose tube
Fiber colour code	See table A
Loose tube colour	Natural
Assembling	2 ÷ 24 fibers
Protection	With or without Aramidic/Glass yarns
Armouring	Corrugated steel tape thermowelded to outer sheath
Outer sheath	Flame retardant, low smoke and halogen-free or Polyethylene

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

ON REQUEST

Fire resistant
Water resistant
UV resistant
Arctic cables
Oil resistance

(*) Only for PE version

(**) Only for LSZH version

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1

TK-UT9X ARMoured UNITUBE

MAIN FEATURES CST + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 24	3.5	9.0	95	750	2500	10

MAIN FEATURES CST + ARAMIDIC YARNS + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 24	3.5	9.0	110	1500	3000	15

MAIN FEATURES CST + GLASS YARNS + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 24	3.5	10	140	3000	3500	20

MAIN FEATURES CST + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 24	3.5	9.0	55	750	2500	10

MAIN FEATURES CST + ARAMIDIC YARNS + PE SHEATH


No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 24	3.5	9.0	85	1500	3000	15

MAIN FEATURES CST + GLASS YARNS + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 24	3.5	10	100	3000	3500	20

TK-UTXD ARMoured UNITUBE DOUBLE SHEATH

ON REQUEST

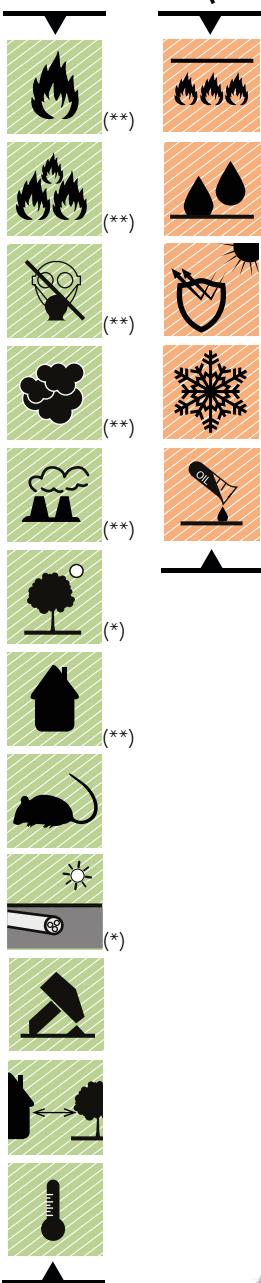

CABLE SPECIFICATIONS

Fiber structure

Jelly filled loose tube

See table A

Natural

2 ÷ 24 fibers

Aramidic/Glass yarns

Flame retardant, low smoke and halogen-free or Polyethylene

Galvanized steel wire braid or corrugated and thermowelded steel tape

Flame retardant, low smoke and halogen-free or Polyethylene

Fiber colour code

Loose tube colour

Assembling

Strain relief

Inner sheath

Armouring

Outer sheath

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

Minimum bending radius

10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-22

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Fire resistant

Water resistant

UV resistant

Arctic cables

Oil resistance

(*) Only for PE version

(**) Only for LSZH version



TK-UTXD ARMoured UNITUBE DOUBLE SHEATH

MAIN FEATURES LSZH + GSWB + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 12	2.8	8.6	100	1500	2500	10
13 ÷ 24	3.5	10	130	1500	2500	10

MAIN FEATURES PE + GSWB + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 12	2.8	8.6	70	1500	2500	10
13 ÷ 24	3.5	10	90	1500	2500	10

MAIN FEATURES LSZH + CST + LSZH SHEATH


No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 12	2.8	10	125	2000	3000	15
13 ÷ 24	3.5	10.5	145	2000	3000	15

MAIN FEATURES PE + CST + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
2 ÷ 12	2.8	10	85	2000	3000	15
13 ÷ 24	3.5	10.5	105	2000	3000	15

TK-MT9X ARMoured MULTITUBE

ON REQUEST

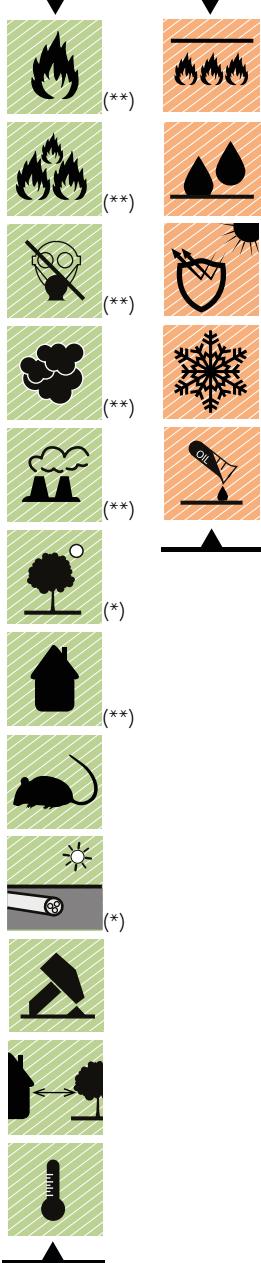

CABLE SPECIFICATIONS

Fiber structure	Jelly filled loose tube
Fiber colour code	See table A
Loose tube colour	See table B
Assembling	6 ÷ 24 loose tubes/fillers 12 ÷ 288 fibers
Central element	Fiber reinforced polymer
Protection	With or without Aramidic/Glass yarns
Armouring	Corrugated steel tape thermowelded to outer sheath
Outer sheath	Flame retardant, low smoke and halogen-free or Polyethylene

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	10xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

ON REQUEST

Fire resistant
Water resistant
UV resistant
Arctic cables
Oil resistance

(*) Only for PE version
(**) Only for LSZH version

CPR

Cca - s1b, d1, a1

TK-MT9X ARMoured MULTITUBE

MAIN FEATURES CST + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	11.0	150	1500	2000	15
24	1.9	2	4	11.0	150	1500	2000	15
36	1.9	3	3	11.0	150	1500	2000	15
48	1.9	4	2	11.0	150	1500	2000	15
60	1.9	5	1	11.0	150	1500	2000	15
72	1.9	6	0	11.0	150	1500	2000	15
96	1.9	8	0	12.0	170	2000	2500	20
144	1.9	12	0	14.5	230	2000	2500	20
192	1.9	16	0	14.5	230	2000	2000	20
216	1.9	18	0	15.5	260	2000	2000	25
288	1.9	24	0	17.5	350	2000	3000	25

MAIN FEATURES ARAMIDIC + CST + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	12.0	160	2000	2000	15
24	1.9	2	4	12.0	160	2000	2000	15
36	1.9	3	3	12.0	160	2000	2000	15
48	1.9	4	2	12.0	160	2000	2000	15
60	1.9	5	1	12.0	160	2000	2000	15
72	1.9	6	0	12.0	160	2000	2000	15
96	1.9	8	0	13.0	180	2500	2500	20
144	1.9	12	0	15.5	250	2500	2500	20
192	1.9	16	0	15.5	250	3000	3000	25
216	1.9	18	0	16.5	280	3000	3000	25
288	1.9	24	0	18.5	360	3500	3000	25

►TK-MT9X ARMoured MULTITUBE

MAIN FEATURES GLASS YARNS + CST + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	12.0	170	2500	2000	15
24	1.9	2	4	12.0	170	2500	2000	15
36	1.9	3	3	12.0	170	2500	2000	15
48	1.9	4	2	12.0	170	2500	2000	15
60	1.9	5	1	12.0	170	2500	2000	15
72	1.9	6	0	12.0	170	2500	2000	15
96	1.9	8	0	13.0	190	3000	2500	20
144	1.9	12	0	15.5	270	2500	2500	20
192	1.9	16	0	15.5	270	3000	3000	25
216	1.9	18	0	15.5	300	3000	3000	25
288	1.9	24	0	17.5	380	3500	3000	25

MAIN FEATURES CST + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	11.0	120	1500	2000	15
24	1.9	2	4	11.0	120	1500	2000	15
36	1.9	3	3	11.0	120	1500	2000	15
48	1.9	4	2	11.0	120	1500	2000	15
60	1.9	5	1	11.0	120	1500	2000	15
72	1.9	6	0	11.0	120	1500	2000	15
96	1.9	8	0	12.0	140	2000	2500	20
144	1.9	12	0	14.5	190	2000	2500	20
192	1.9	16	0	14.5	190	2000	2000	20
216	1.9	18	0	15.5	220	2000	2000	25
288	1.9	24	0	17.5	260	2500	3000	25

TK-MT9X ARMoured MULTITUBE

MAIN FEATURES ARAMIDIC + CST + PE SHEATH


No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	12.0	130	2000	2000	15
24	1.9	2	4	12.0	130	2000	2000	15
36	1.9	3	3	12.0	130	2000	2000	15
48	1.9	4	2	12.0	130	2000	2000	15
60	1.9	5	1	12.0	130	2000	2000	15
72	1.9	6	0	12.0	130	2000	2000	15
96	1.9	8	0	13.0	150	2500	2500	20
144	1.9	12	0	15.5	210	2500	2500	20
192	1.9	16	0	15.5	210	3000	3000	25
216	1.9	18	0	16.5	240	3000	3000	25
288	1.9	24	0	18.5	290	3500	3000	25

MAIN FEATURES GLASS YARNS + CST + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	12.0	140	2000	2000	15
24	1.9	2	4	12.0	140	2000	2000	15
36	1.9	3	3	12.0	140	2000	2000	15
48	1.9	4	2	12.0	140	2000	2000	15
60	1.9	5	1	12.0	140	2000	2000	15
72	1.9	6	0	12.0	140	2000	2000	15
96	1.9	8	0	13.0	160	2500	2500	20
144	1.9	12	0	15.5	220	2500	2500	20
192	1.9	16	0	15.5	220	3000	3000	25
216	1.9	18	0	16.5	250	3000	3000	25
288	1.9	24	0	18.5	310	3500	3000	25

TK-API AIRBAG PROTECTION

ON REQUEST

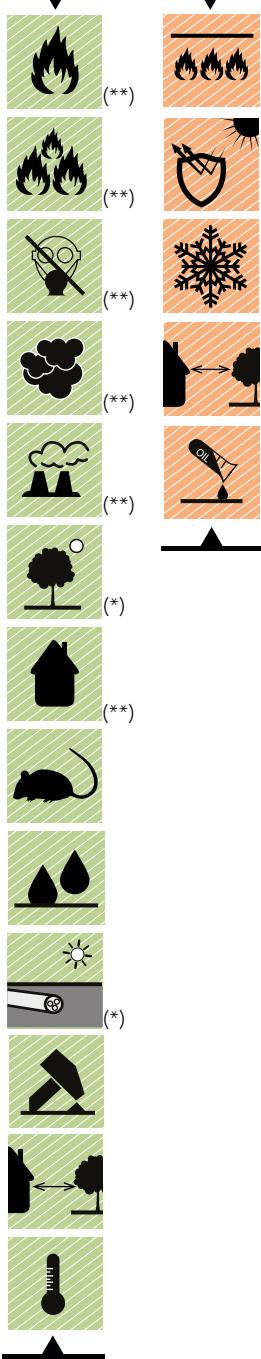

CABLE SPECIFICATIONS

Fiber structure	Jelly filled loose tube
Fiber colour code	See table A
Loose tube color	See table B
Assembling	8 loose tubes/fillers 16 ÷ 96 fibers
Central element	Fiber reinforced polymer
Inner sheath	Flame retardant, low smoke and halogen-free or Polyethylene
Mechanical protection	Dielectric layer
Armouring	Anti rodent glass protection
Outer sheath	Flame retardant, low smoke and halogen-free or Polyethylene

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

ON REQUEST

Fire resistant
UV resistant
Arctic cables
Oil resistance

(*) Only for PE version

(**) Only for LSZH version



Cca - s1b, d1, a1

TK-API AIRBAG PROTECTION

MAIN FEATURES LSZH + AIRBAG + GLASS TAPE AND YARNS + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
16	1.8	4	4	18.0	290	3000	10000	30
32	1.8	8	0	18.0	290	3000	10000	30
48	1.8	6	2	20.0	345	3000	10000	30
64	1.8	8	0	20.0	345	3000	10000	30
96	1.8	8	0	20.0	345	3000	10000	30


MAIN FEATURES PE + AIRBAG + GLASS TAPE AND YARNS + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
16	1.8	4	4	18.0	235	3000	10000	30
32	1.8	8	0	18.0	235	3000	10000	30
48	1.8	6	2	20.0	280	3000	10000	30
64	1.8	8	0	20.0	280	3000	10000	30
96	1.8	8	0	20.0	280	3000	10000	30



TK-MT6X ARMoured MULTITUBE

ON REQUEST

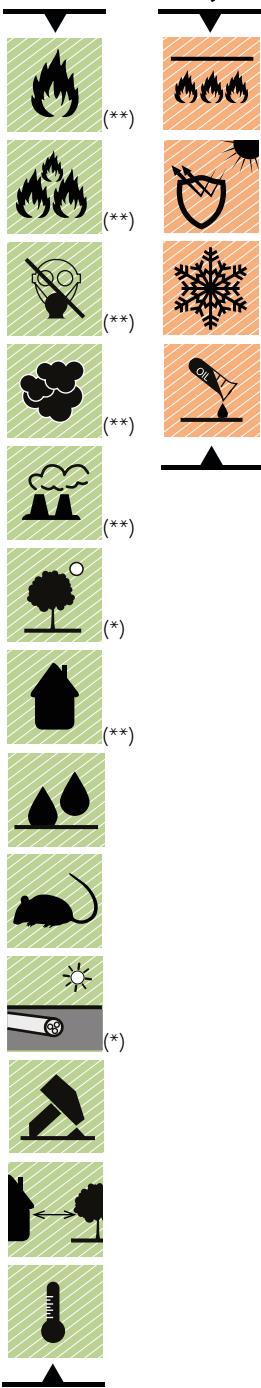

CABLE SPECIFICATIONS

Fiber structure	Jelly filled loose tube
Fiber colour code	See table A
Loose tube color	See table B
Assembling	8 loose tubes/fillers 16 ÷ 96 fibers
Central element	Fiber reinforced polymer
Inner sheath	Flame retardant, low smoke and halogen-free or Polyethylene
Strain relief	Aramidic layer
Armouring	Welded and corrugated steel tape (H6)
Anticorrosion protection	Bituminous/Jelly layer
Outer sheath	Flame retardant, low smoke and halogen-free or Polyethylene

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature	- 40 °C ÷ + 70 °C
Minimum bending radius	15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation	IEC 60332-1-2
Smoke density	IEC 60332-3-24
Halogen-free	IEC 61034-1/2
Fumes	IEC 60754-1/2
	No corrosive and toxic fumes

ON REQUEST

Fire resistant
UV resistant
Arctic cables
Oil resistance

(*) Only for PE version

(**) Only for LSZH version

CPR

B2ca - s1a, d1, a1
Cca - s1b, d1, a1


TK-MT6X ARMOURED MULTITUBE

MAIN FEATURES LSZH + ARAMIDIC YARNS + H6 + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
16	1.8	4	4	20.0	460	3000	10000	30
32	1.8	8	0	20.0	460	3000	10000	30
48	1.8	6	2	20.0	460	3000	10000	30
64	1.8	8	0	20.0	460	3000	10000	30
96	1.8	8	0	20.0	460	3000	10000	30


MAIN FEATURES PE + ARAMIDIC YARNS + H6 + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
16	1.8	4	4	20.0	380	3000	10000	30
32	1.8	8	0	20.0	380	3000	10000	30
48	1.8	6	2	20.0	380	3000	10000	30
64	1.8	8	0	20.0	380	3000	10000	30
96	1.8	8	0	20.0	380	3000	10000	30

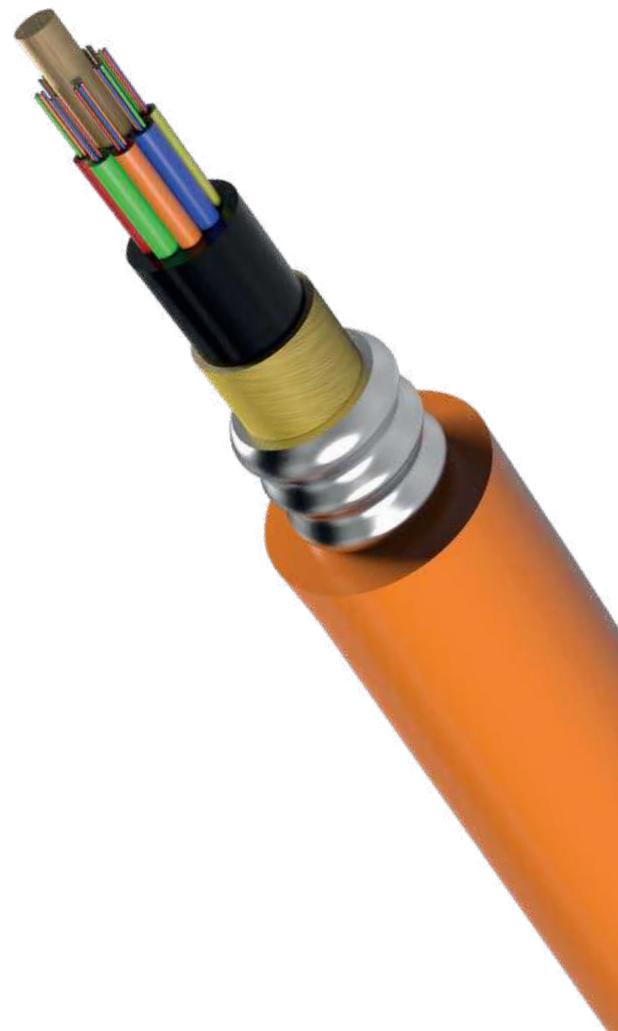

TK-MTAS MULTITUBE ADSS

ON REQUEST

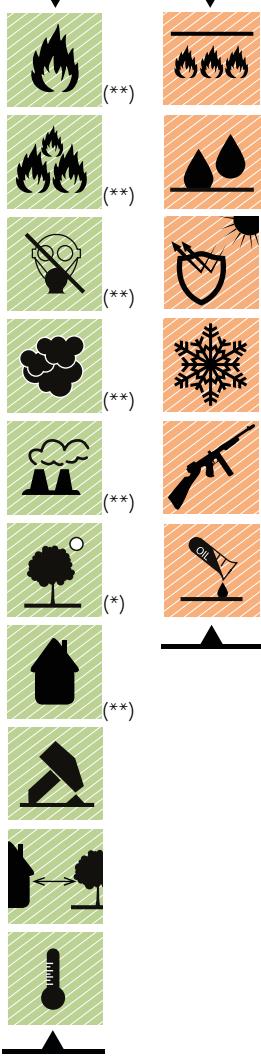

CABLE SPECIFICATIONS

Fiber structure

Fiber colour code

Loose tube color

Assembling

Central element

Inner sheath

***Antibalistic protection**

Strain relief

Outer sheath

Jelly filled loose tube

See table A

See table B

6 ÷ 24 loose tubes/fillers

12 ÷ 288 fibers

Fiber reinforced polymer

Flame retardant, low smoke and halogen-free or Polyethylene

Aramidic tapes or glass flats

Aramidic layer

Flame retardant, low smoke and halogen-free or Polyethylene

* On request.

All cables are available with all type of fibers.

TECHNICAL DATA

Operating temperature

- 40 °C ÷ + 70 °C

15xØ

FIRE PERFORMANCE

(**) Only for LSZH version

Fire propagation

IEC 60332-1-2

IEC 60332-3-24

Smoke density

IEC 61034-1/2

Halogen-free

IEC 60754-1/2

Fumes

No corrosive and toxic fumes

ON REQUEST

Fire resistant

Water resistant

UV resistant

Arctic cables

Oil resistance



(*) Only for PE version

(**) Only for LSZH version

CPR

Cca - s1b, d1, a1

TK-MTAS MULTITUBE ADSS

MAIN FEATURES LSZH + ARAMIDIC YARNS + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	13.0	160	7500	3000	20
24	1.9	2	4	13.0	160	7500	3000	20
36	1.9	3	3	13.0	160	7500	3000	20
48	1.9	4	2	13.0	190	7500	3000	20
60	1.9	5	1	13.0	160	7500	3000	20
72	1.9	6	0	13.0	160	7500	3000	20
96	1.9	8	0	14.0	200	7500	3000	20
144	1.9	12	0	16.5	240	7500	3000	20
192	1.9	16	0	16.5	240	7500	3000	20
216	1.9	18	0	17.0	280	7500	3000	20
288	1.9	24	0	19.0	370	7500	3000	20

MAIN FEATURES LSZH + ARAMIDIC YARNS AND TAPES + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	15.0	190	7500	3000	20
24	1.9	2	4	15.0	190	7500	3000	20
36	1.9	3	3	15.0	190	7500	3000	20
48	1.9	4	2	15.0	190	7500	3000	20
60	1.9	5	1	15.0	190	7500	3000	20
72	1.9	6	0	15.0	190	7500	3000	20
96	1.9	8	0	16.0	230	7500	3000	20
144	1.9	12	0	18.5	280	7500	3000	20
192	1.9	16	0	18.5	280	7500	3000	20
216	1.9	18	0	19.0	320	7500	3000	20
288	1.9	24	0	21.0	420	7500	3000	20

MAIN FEATURES LSZH + ARAMIDIC YARNS + GLASS FLAT + LSZH SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	15.0	210	7500	3000	20
24	1.9	2	4	15.0	210	7500	3000	20
36	1.9	3	3	15.0	210	7500	3000	20
48	1.9	4	2	15.0	210	7500	3000	20
60	1.9	5	1	15.0	210	7500	3000	20
72	1.9	6	0	15.0	210	7500	3000	20
96	1.9	8	0	16.0	260	7500	3000	20
144	1.9	12	0	18.5	320	7500	3000	20
192	1.9	16	0	18.5	320	7500	3000	20
216	1.9	18	0	19.0	360	7500	3000	20
288	1.9	24	0	21.0	480	7500	3000	20

►TK-MTAS MULTITUBE ADSS

MAIN FEATURES PE + ARAMIDIC YARNS + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	13.0	120	7500	3000	20
24	1.9	2	4	13.0	120	7500	3000	20
36	1.9	3	3	13.0	120	7500	3000	20
48	1.9	4	2	13.0	120	7500	3000	20
60	1.9	5	1	13.0	120	7500	3000	20
72	1.9	6	0	13.0	120	7500	3000	20
96	1.9	8	0	14.0	140	7500	3000	20
144	1.9	12	0	16.5	200	7500	3000	20
192	1.9	16	0	16.5	200	7500	3000	20
216	1.9	18	0	17.0	230	7500	3000	20
288	1.9	24	0	19.0	290	7500	3000	20

MAIN FEATURES PE + ARAMIDIC YARNS AND TAPES + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	15.0	150	7500	3000	20
24	1.9	2	4	15.0	150	7500	3000	20
36	1.9	3	3	15.0	150	7500	3000	20
48	1.9	4	2	15.0	150	7500	3000	20
60	1.9	5	1	15.0	150	7500	3000	20
72	1.9	6	0	15.0	150	7500	3000	20
96	1.9	8	0	16.0	160	7500	3000	20
144	1.9	12	0	18.5	240	7500	3000	20
192	1.9	16	0	18.5	240	7500	3000	20
216	1.9	18	0	19.0	270	7500	3000	20
288	1.9	24	0	21.0	330	7500	3000	20

MAIN FEATURES PE + ARAMIDIC YARNS + GLASS FLAT + PE SHEATH

No. of fiber	Loose nominal diameter Ø (mm)	No. loose	No. filler	Cable nominal diameter Ø (mm)	Nominal weight (kg/km)	Max pulling force (N)	Max crush (N/dm)	Impact (J)
12	1.9	1	5	15.0	170	7500	3000	20
24	1.9	2	4	15.0	170	7500	3000	20
36	1.9	3	3	15.0	170	7500	3000	20
48	1.9	4	2	15.0	170	7500	3000	20
60	1.9	5	1	15.0	170	7500	3000	20
72	1.9	6	0	15.0	170	7500	3000	20
96	1.9	8	0	16.0	190	7500	3000	20
144	1.9	12	0	18.5	260	7500	3000	20
192	1.9	16	0	18.5	260	7500	3000	20
216	1.9	18	0	19.0	310	7500	3000	20
288	1.9	24	0	21.0	380	7500	3000	20

► FIBER CHARACTERISTICS

SINGLEMODE FIBER PROPERTIES

	SM-LWP ITU-T G.652.D	SM ITU-T G.657.A1	SM ITU-T G.657.A2	SM - 200 µm ITU-T G.657.A2	SM NZD ITU-T G.655.D
Mode Field Diameter @ 1310 nm	9.1 ± 0.4 µm	9.1 ± 0.4 µm	8.6 ± 0.4 µm	8.8 ± 0.4 µm	
Mode Field Diameter @ 1550 nm	10.2 ± 0.5 µm	10.2 ± 0.5 µm		9.8 ± 0.5 µm	9.6 ± 0.4 µm
Cladding diameter	125.0 ± 0.7 µm	125.0 ± 0.7 µm	125.0 ± 0.7 µm	125.0 ± 0.7 µm	125.0 ± 0.7 µm
Coating diameter	242 ± 7 µm	242 ± 7 µm	242 ± 7 µm	200 ± 10 µm	242 ± 7 µm
Cladding non-circularity	≤ 0.7 %	≤ 0.7 %	≤ 0.7 %	≤ 0.7 %	≤ 1.0 %
Core/cladding concentricity error	≤ 0.5 µm	≤ 0.5 µm	≤ 0.5 µm	≤ 0.5 µm	≤ 0.5 µm
Coating/cladding concentricity error	≤ 12 µm	≤ 12 µm	≤ 12 µm	≤ 12 µm	≤ 12 µm
Cable cut-off wavelength	≤ 1260 nm	≤ 1260 nm	≤ 1260 nm	≤ 1260 nm	≤ 1450 nm
Zero dispersion wavelength (λ_0)	1300-1324 nm	1300-1324 nm	1300-1324 nm	1300-1324 nm	
Dispersion slope (S₀) @ (λ_0)	≤ 0.090 ps/(nm ² *km)	≤ 0.090 ps/(nm ² *km)	≤ 0.092 ps/(nm ² *km)	≤ 0.092 ps/(nm ² *km)	
Chromatic dispersion @ 1285 - 1330 nm	≤ 3.5 ps/(nm*km)	≤ 3.5 ps/(nm*km)			
Chromatic dispersion @ 1550 nm	≤ 18 ps/(nm*km)	≤ 18 ps/(nm*km)			
Chromatic dispersion @ 1625 nm	≤ 22 ps/(nm*km)	≤ 22 ps/(nm*km)			
Chromatic dispersion @ 1530 - 1565 nm					2.0 - 6.0 ps/(nm*km)
Chromatic dispersion @ 1565 - 1625 nm					4.5 to 11.2 ps/(nm*km)
PMD Individual Fiber @ 1550 nm	≤ 0.1 ps/ $\sqrt{\text{km}}$	≤ 0.1 ps/ $\sqrt{\text{km}}$	≤ 0.1 ps/ $\sqrt{\text{km}}$	≤ 0.1 ps/ $\sqrt{\text{km}}$	≤ 0.15 ps/ $\sqrt{\text{km}}$
Attenuation @ 1310 nm	≤ 0.36 dB/km	≤ 0.36 dB/km	≤ 0.36 dB/km	≤ 0.36 dB/km	
Attenuation @ 1383nm	≤ 0.36 dB/km	≤ 0.36 dB/km	≤ 0.36 dB/km	≤ 0.36 dB/km	
Attenuation @ 1550 nm	≤ 0.25 dB/km	≤ 0.25 dB/km	≤ 0.25 dB/km	≤ 0.25 dB/km	≤ 0.27 dB/km
Attenuation @ 1625 nm	≤ 0.28 dB/km	≤ 0.28 dB/km	≤ 0.28 dB/km	≤ 0.28 dB/km	≤ 0.30 dB/km
Attenuation with bending					
Mandrel Radius 15mm@1550 10 turns		≤ 0.25 dB	≤ 0.03 dB	≤ 0.25 dB	
Mandrel Radius 15mm@1625 10 turns		≤ 1.0 dB	≤ 0.1 dB	≤ 0.1 dB	
Mandrel Radius 10mm@1550 1 turns		≤ 0.75 dB	≤ 0.1 dB	≤ 0.75 dB	
Mandrel Radius 10mm@1625 1 turns		≤ 1.5 dB	≤ 0.2 dB	≤ 1.5 dB	
Mandrel Radius 7.5mm@1550 1 turns			≤ 0.5 dB		
Mandrel Radius 7.5mm@1625 1 turns			≤ 1.0 dB		
Fibre capacity 1000BASE-LX	5 km	5 km	5 km	5 km	5 km
Fibre capacity 10GBASE-LR	10 km	10 km	10 km	10 km	10 km
Fibre capacity 10GBASE-ER	40 km	40 km	40 km	40 km	40 km
Fibre capacity 100GBASE-LR4	10 km	10 km	10 km	10 km	10 km
Fibre capacity 100GBASE-ER4	40 km	40 km	40 km	40 km	40 km
Proof test	≥ 0.7 GPa	≥ 0.7 GPa	≥ 0.7 GPa	≥ 0.7 GPa	≥ 0.7 GPa

► FIBER CHARACTERISTICS



SPECIAL ELECTRICAL AND OPTICAL CABLES

HEADQUARTER

VOLPIANO
Via Brandizzo, 243
10088 Volpiano (Turin) Italy
Tel. +39 011 9951997
Fax +39 011 9953062
www.tecnikabel.com

PRODUCTION PLANTS

VOLPIANO
Via Brandizzo, 243
10088 Volpiano (Turin) Italy

ALMESE
Via Rivera, 100
10040 Almese (Turin) Italy

PRODUCTION



TK CHINA
Cables & Connectors
Factory Premises Co., Ltd No. 7
111 North Dongting Road
Taicang Economy Development Area
Taicang City, Jiangsu Province, China
Tel. +8617751210891

DISTRIBUTION



TECNIKABEL ME JLT
3008 Mazaya Business Avenue
Jumeirah Lake Towers
Dubai, UAE
Tel. +9714 4230877

BRANCH OFFICES



TECNIKABEL ROME
Via Casali delle Cornacchiele, 160
00178 Roma Italy
Tel. +39 06 5099 2552
Fax +39 06 5051 4022



TECNIKABEL ASIA PTE LTD
11 Woodlands Close,
Woodlands 11, #10-40,
Singapore 737853
Tel. +65 6909 3710



TECNIKABEL USA
1811-B Asheville Hwy
Hendersonville, NC 28791
Tel. +1 (828) 845-4180
www.tecnikabel.us